


# Wireless Product Matrix


April 2026

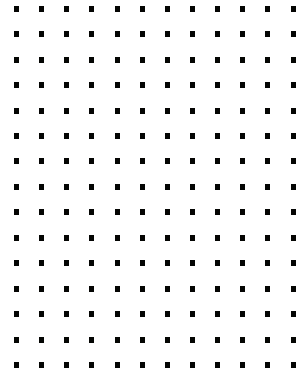

Large campuses, distributed enterprises, and small businesses all have diverse WLAN architecture needs. That's why Fortinet provides a variety of models, from 2x2 to 4x4, internal or external antenna, to address any use case. Fortinet offers flexibility for configuration and control, either using our FortiGate security appliance as a controller or our cloud platform FortiEdge Cloud.


## FortiGate Managed

The FortiGate Wireless Controller is built into all FortiGate models and does not require any additional licensing to use. This results in security-driven networking, where the network is converged with, and driven by security. The FortiLink protocol allows the FortiGate appliance to extend its best in class security directly to the wireless edge. Base NAC features are also included, giving more features and lower TCO. As part of our Security Fabric, the FortiGate Managed offering also allows for an extensive set of troubleshooting and reporting tools with FortiWLM and Artificial Intelligence with Machine Learning using FortiAIOps all within our Fabric Management Center.

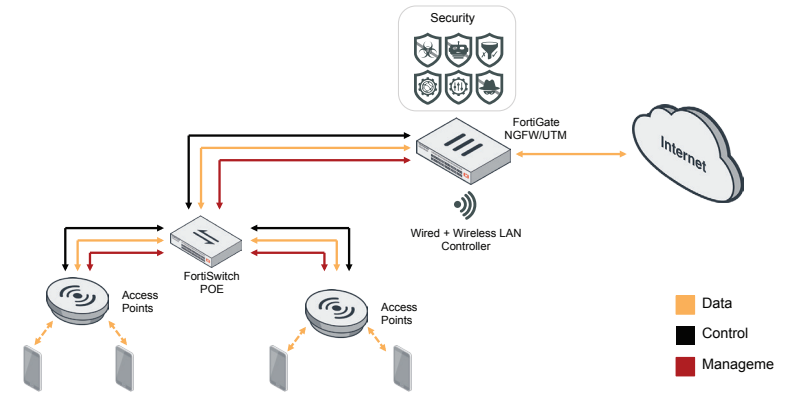



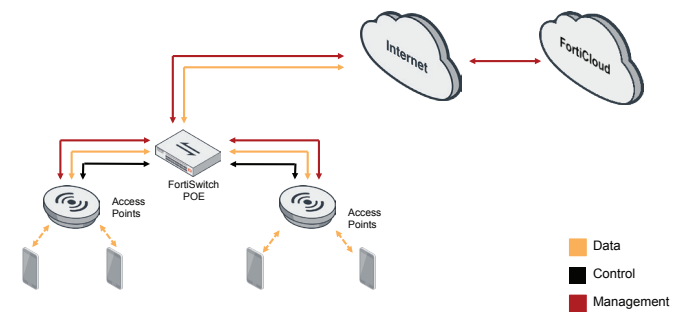

## FortiEdge Cloud Managed





FortiEdge Cloud management allows for centralized hosted cloud control of standalone FortiAP devices, scaling from a handful to thousands of FortiAPs. A FortiEdge Cloud subscription enables advanced features & troubleshooting plus additional configuration options and log retention.





# FortiAP™ Integrated or Cloud Managed Wi-Fi 7 (802.11be) Access Points

	FAP-23JK	FAP-231K	FAP-241K	FAP-243K
				
<b>Suggested Use Case</b>	WiFi-7 indoor	WiFi-7 indoor	WiFi-7 indoor	WiFi-7 indoor
<b>Hardware</b>				
<b>Number of Radios</b>	3 + 1 BLE	3 + 1 BLE	4 + 1 BLE	4 + 1 BLE
<b>Number of Antennas</b>	4 Internal + 1 BLE Internal	4 Internal + 1 BLE Internal	6 Internal + 1 BLE Internal	6 External + 1 BLE Internal
<b>Antenna Type and Peak Gain</b>	Refer to Data Sheet	Refer to Data Sheet	Refer to Data Sheet	Refer to Data Sheet
<b>Radio 1 Capabilities</b>	2.4 GHz 2x2 20/40MHz	2.4 GHz 2x2 20/40MHz	2.4 GHz 2x2 20/40MHz	2.4 GHz 2x2 20/40MHz
<b>Radio 2 Capabilities</b>	5.0 GHz 2x2 20/40/80/160MHz	5.0 GHz 2x2 20/40/80/160MHz	5.0 GHz 2x2 20/40/80/160/240MHz	5.0 GHz 2x2 20/40/80/160/240MHz
<b>Radio 3 Capabilities</b>	6.0 GHz 2x2 20/40/80/160/320MHz	6.0 GHz 2x2 20/40/80/160/320MHz	6.0 GHz 2x2 20/40/80/160/320MHz	6.0 GHz 2x2 20/40/80/160/320MHz
<b>Radio 4 Capabilities (scanning only)</b>	-	-	2.4/5.0/6.0GHz 2x2 20/40/80/160MHz	2.4/5.0/6.0GHz 2x2 20/40/80/160MHz
<b>Maximum Data Rate</b>	Radio 1: up to 688 Mbps Radio 2:: up to 2.882 Gbps Radio 3: up to 5.765 Gbps	Radio 1: up to 688 Mbps Radio 2:: up to 2.882 Gbps Radio 3: up to 5.765 Gbps	Radio 1: up to 688 Mbps Radio 2:: up to 4.324 Gbps Radio 3: up to 5.765 Gbps	Radio 1: up to 688 Mbps Radio 2:: up to 4.324 Gbps Radio 3: up to 5.765 Gbps
<b>BLE/ZigBee</b>	• / •	• / •	• / •	• / •
<b>Interfaces</b>	1x 10/5/2.5/GE RJ45, 5x GE RJ45 1x RS-232 RJ45 Serial Port	1x 5/2.5/GE RJ45 1x RS-232 RJ45 Serial Port	1x 10/5/2.5/GE RJ45, 1x GE RJ45 1x RS-232 RJ45 Serial Port	1x 10/5/2.5/GE RJ45, 1x GE RJ45 1x RS-232 RJ45 Serial Port
<b>Power over Ethernet (PoE)</b>	802.3at	x1 802.3at PoE default	x1 802.3bt PoE default	x1 802.3bt PoE default
<b>Power Consumption (Max.)</b>	31 W	15.2 W	26.1 W	26.1 W
<b>Simultaneous SSIDs</b>	Up to 24	Up to 24	Up to 24	Up to 24
<b>Maximum Tx Power</b>	2.4GHz band: 25 dBm/316 mW (2 chains combined) 5.0GHz band: 22 dBm/158 mW (2 chains combined) 6.0GHz band: 21 dBm/125 mW (2 chains combined@320MHz BW)	2.4GHz band: 26 dBm/400 mW (2 chains combined) 5.0GHz band: 23 dBm/200 mW (2 chains combined) 6.0GHz band: 22 dBm/158 mW (2 chains combined@320MHz BW)	2.4GHz band: 25 dBm/316 mW (2 chains combined) 5.0GHz band: 26 dBm/400 mW (2 chains combined) 6.0GHz band: 23 dBm/200 mW (2 chains combined@320MHz BW)	2.4GHz band: 25 dBm/316 mW (2 chains combined) 5.0GHz band: 26 dBm/400 mW (2 chains combined) 6.0GHz band: 23 dBm/200 mW (2 chains combined@320MHz BW)
<b>SSID Types Supported</b>	Local-Bridge, Tunnel & Mesh	Local-Bridge, Tunnel & Mesh	Local-Bridge, Tunnel & Mesh	Local-Bridge, Tunnel & Mesh
<b>Per Radio Client Capacity</b>	Up to 256 per radio (Radio1, 2 & 3)	Up to 256 per radio (Radio1, 2 & 3)	Up to 512 per radio (Radio1, 2 & 3)	Up to 512 per radio (Radio1, 2 & 3)
<b>Certifications</b>				
<b>Wi-Fi Alliance Certified</b>	•	•	•	•
<b>DFS Certified</b>	Europe, FCC, Japan, Australia, N	Europe, FCC, Japan, Australia, N, Taiwan, S. Korea, India	Europe, FCC, Japan, Australia, Brazil, Taiwan, India	Europe, FCC, Japan, Australia, Brazil, Taiwan, India




# FortiAP™ Integrated or Cloud Managed Wi-Fi 7 (802.11be) Access Points

	FAP-441K	FAP-443K	FAP-222KL	FAP-244K
				
<b>Suggested Use Case</b>	WiFi-7 indoor	WiFi-7 indoor	WiFi-7 outdoor	WiFi-7 outdoor
<b>Hardware</b>				
<b>Number of Radios</b>	4 + 1 BLE	4 + 1 BLE	2 Wi-Fi + 1 LoraWAN + 1 LTE + 1 GNSS	4 + 1 BLE
<b>Number of Antennas</b>	10 Internal + 1 BLE Internal + 1 Internal GPS	10 External + 1 BLE External + 1 Internal GPS	5 External Antennas	7 Internal Antennas
<b>Antenna Type and Peak Gain</b>	Refer to Data Sheet	Refer to Data Sheet	Refer to Data Sheet	Refer to Data Sheet
<b>Radio 1 Capabilities</b>	2.4 GHz 4x4 20/40MHz	2.4 GHz 4x4 20/40MHz	2.4 GHz 2x2 20/40MHz	2.4 GHz 2x2 20/40MHz
<b>Radio 2 Capabilities</b>	5.0 GHz 4x4 20/40/80/160/240MHz	5.0 GHz 4x4 20/40/80/160/240MHz	5.0 GHz 2x2 20/40/80/160/240MHz	5.0 GHz 2x2 20/40/80/160/240MHz
<b>Radio 3 Capabilities</b>	6.0 GHz 4x4 20/40/80/160/320MHz	6.0 GHz 4x4 20/40/80/160/320MHz	-	6.0 GHz 2x2 20/40/80/160/320MHz
<b>Radio 4 Capabilities (scanning only)</b>	2.4/5.0/6.0GHz 2x2 20/40/80/160MHz	2.4/5.0/6.0GHz 2x2 20/40/80/160MHz	-	2.4/5.0/6.0GHz 2x2 20/40/80/160MHz
<b>Maximum Data Rate</b>	Radio 1: up to 1.148 Gbps Radio 2: up to 8.648 Gbps Radio 3: up to 11.530 Gbps	Radio 1: up to 1.148 Gbps Radio 2: up to 8.648 Gbps Radio 3: up to 11.530 Gbps	Radio 1: up to 688 Gbps Radio 2: up to 4.324 Gbps	Radio 1: up to 688 Gbps Radio 2: up to 4.324 Gbps Radio 3: up to 5.765 Gbps
<b>BLE/ZigBee</b>	• / •	• / •	- / -	- / -
<b>Interfaces</b>	2x 10/5/2.5/GE RJ45, 1x RS-232 RJ45 Serial Port	2x 10/5/2.5/GE RJ45, 1x RS-232 RJ45 Serial Port	1x 2.5/GE RJ45, 1x GE RJ45, 1x RS-232 RJ45 Serial Port	1x 2.5/GE RJ45, 1x GE RJ45, 1x RS-232 RJ45 Serial Port
<b>Power over Ethernet (PoE)</b>	802.3bt PoE default or x2 802.3at PoE (Dual PoE current sharing)	802.3bt PoE default or x2 802.3at PoE (Dual PoE current sharing)	x1 802.3bt PoE	x1 802.3bt PoE
<b>Power Consumption (Max.)</b>	41.7 W	41.7 W	26 W	26 W
<b>Simultaneous SSIDs</b>	Up to 24	Up to 24	Up to 8 per client serving radio	Up to 8 per client serving radio
<b>Maximum Tx Power</b>	2.4GHz band: 29 dBm / 794 mW (4 chains combined) 5.0GHz band: 27.8 dBm / 602 mW (4 chains combined) 6.0GHz band: 23 dBm / 200 mW (4 chains combined @160MHz BW)	2.4GHz band: 29 dBm / 794 mW (4 chains combined) 5.0GHz band: 27.8 dBm / 602 mW (4 chains combined) 6.0GHz band: 23 dBm / 200 mW (4 chains combined @160MHz BW)	2.4GHz band: 25 dB/316 mw 5.0GHz band: 26 dB/400 mw	2.4GHz band: 25 dB/316 mow 5.0GHz band: 26 dB/400 mow 6.0GHz band: 23 dB/200 mow
<b>SSID Types Supported</b>	Local-Bridge, Tunnel & Mesh	Local-Bridge, Tunnel & Mesh	Local-Bridge, Mesh, and Tunnel	Local-Bridge, Mesh, and Tunnel
<b>Per Radio Client Capacity</b>	Up to 512 per radio (Radio1, 2 & 3)	Up to 512 per radio (Radio1, 2 & 3)	Up to 512 per radio (Radio1 & 2)	Up to 512 per radio (Radio1, 2 & 3)
<b>Certifications</b>				
<b>Wi-Fi Alliance Certified</b>	•	•	In-Progress	•
<b>DFS Certified</b>	Europe, FCC, Japan, Australia, Brazil, Taiwan, S. Korea, India	Europe, FCC, Australia, Brazil, Taiwan, S. Korea, India	FCC, IC and CE	FCC, IC and CE







# FortiAP™ Integrated or Cloud Managed Wi-Fi 6E (802.11ax) Access Points

	FAP-234G	FAP-432G	
			
<b>Suggested Use Case</b>	WiFi-6E Outdoor	WiFi-6E Outdoor	
<b>Hardware</b>			
<b>Number of Radios</b>	3 + 1 BLE	3 + 1 BLE	
<b>Number of Antennas</b>	8 Internal + 1 BLE Internal, 1 GPS Internal	8 External + 1 BLE	
<b>Antenna Type and Peak Gain</b>	Refer to Data Sheet	Refer to Data Sheet	
<b>Radio 1 Capabilities</b>	2.4 GHz 2x2 20/40MHz	2.4 GHz 4x4 20/40MHz	
<b>Radio 2 Capabilities</b>	5.0 GHz 2x2 20/40/80MHz	5.0 GHz 4x4 20/40/80MHz	
<b>Radio 3 Capabilities (Service and Scanning)</b>	2.4/5.0/6.0 GHz 2x2 20/40/80/160 MHz	2.4/5.0/6.0 GHz 4x4 20/40/80/160 MHz	
<b>Maximum Data Rate</b>	Radio 1: up to 574 Mbps Radio 2: up to 1201 Mbps Radio 3: up to 2401 Mbps	Radio 1: up to 1182 Mbps Radio 2: up to 2475 Mbps Radio 3: Up to 4804 Mbps	
<b>BLE/ZigBee/TPM</b>	• / • / -	• / • / -	
<b>Interfaces</b>	1x 2.5GE RJ45, 1 x GE RJ45, 1x RS-232 RJ45 Serial Port	1x 10GE RJ45, 1 x GE RJ45, 1x RS-232 RJ45 Serial Port	
<b>Power over Ethernet (PoE)</b>	802.3bt	802.3bt	
<b>Power Consumption (Max.)</b>	28 W	41.2 W	
<b>Simultaneous SSIDs</b>	Up to 24	Up to 8 per client serving radio	
<b>Maximum Tx Power</b>	Radio 1: 2.4GHz: 26 dBm / 398 mW (2 chains combined) Radio 2: 5GHz: 26 dBm / 398 mW (2 chains combined) Radio 3: 5GHz: 26 dBm / 398 mW (2 chains combined), 6GHz: 26dBm/398 mW (2 chains combined EIRP)	Radio 1: 2.4GHz: 29.8 dBm / 955 mW (4 chains combined) Radio 2: 5GHz: 29.8 dBm / 955 mW (4 chains combined) Radio 3: 6GHz: 26 dBm / 400 mW (4 chains combined @ 160MHz BW)	
<b>SSID Types Supported</b>	Local-Bridge, Tunnel & Mesh	Local-Bridge, Tunnel & Mesh	
<b>Per Radio Client Capacity</b>	Up to 512 per radio (Radio1, 2 & 3)	Up to 512 per radio (Radio1, 2 & 3)	
<b>Certifications</b>			
<b>Wi-Fi Alliance Certified</b>			
<b>DFS Certified</b>			

# FortiAP™ Integrated or Cloud Managed Wi-Fi 6 (802.11ax) Outdoor and Wall Plate Access Points

	FAP-831F	FAP-432FR	FAP-23JF
			
<b>Suggested Use Case</b>	High performance 802.11ax indoor	Ruggedized indoor/outdoor/industrial	802.11ax wall plate
<b>Hardware</b>			
<b>Number of Radios</b>	3 + 1 BLE	3 + 1 BLE	3 + 1 BLE
<b>Number of Antennas</b>	13 Internal + 1 BLE Internal	5 External + 1 BLE External	3 Internal + 1 BLE Internal
<b>Antenna Type and Peak Gain</b>	PIFA: 4 dBi for 2.4 GHz, 6 dBi for 5.0 GHz, 4 dBi for dual band Scanning	Dipole: 5.5 dBi for 2.4 GHz and 7.2 dBi for 5 GHz	PCB: 4.0 dBi for 2.4 GHz and 4.0 dBi for 5 GHz
<b>Radio 1 Capabilities</b>	2.4 GHz 4x4 20/40MHz	2.4 GHz 20/40MHz	2.4 GHz 20/40MHz
<b>Radio 2 Capabilities</b>	5.0 GHz 8x8 (Mode 1), 4x4 = 4x4 (Mode 2)	5.0 GHz 4x4 20/40/80MHz, 2x2 160MHz	5.0 GHz 2x2 20/40/80MHz
<b>Radio 3 Capabilities (Monitor Only)</b>	2.4/5.0 GHz (1x1)	2.4/5.0 GHz (1x1)	2.4/5.0 GHz (1x1)
<b>Maximum Data Rate</b>	Radio 1: up to 1147 Mbps Radio 2: up to 4.804 Gbps Radio 3: scan only	Radio 1: up to 1147 Mbps Radio 2: up to 2402 Mbps Radio 3: scan only	Radio 1: up to 574 Mbps Radio 2: up to 1200 Mbps Radio 3: scan only
<b>Bluetooth (BT/BLE)</b>	• / -	• / •	• / •
<b>Interfaces</b>	1x 2.5GE RJ45, 1 x GE RJ45, 1x RS-232 RJ45 Serial Port	1x 2.5GE RJ45, 1 x GE RJ45, 1x RS-232 RJ45 Serial Port	2x GE RJ45, 1x 802.3at PoE (PD), 1x 802.3af PoE (PSE), 2x pass-thru (in and out), 1x RS-232 RJ45 Serial Port
<b>Power over Ethernet (PoE)</b>	Dual 802.3at for full function, 802.3at with USB disabled	802.3bt/at	802.3af/at
<b>Power Consumption (Max.)</b>	33 W	25 W w/o PSE out / 37.9 W with PSE out	17.5W w/o PSE out / 31W with PSE out
<b>Simultaneous SSIDs</b>	Up to 8 per client serving radio	16 (14 if background scanning enabled)	16 (14 if background scanning enabled)
<b>Maximum Tx Power</b>	Radio 1: 2.4GHz: 27 dBm / 500 mW (4 chains combined) Radio 2: 5GHz: 25.5 dBm / 354 mW (4 chains combined), Radio 3: NA	Radio 1: 2.4 GHz 29 dBm / 794 mW (4 chains combined)* Radio 2: 5 GHz 28 dBm / 630 mW (4 chains combined)* Radio 3: N/A	Radio 1: 2.4 GHz: 25 dBm / 158 mW (2 chains combined)* Radio 2: 5 GHz: 21 dBm / 158 mW (2 chains combined)* Radio 3: N/A
<b>SSID Types Supported</b>	Local-Bridge, Tunnel & Mesh	Local-Bridge, Tunnel & Mesh	Local-Bridge, Tunnel & Mesh
<b>Per Radio Client Capacity</b>	Up to 512 per radio Radio1 and Radio2	Up to 512 per radio Radio1 and Radio2	Up to 512 per radio Radio1 and Radio2
<b>Certifications</b>			
<b>Wi-Fi Alliance Certified</b>	•	•	•
<b>DFS Certified</b>	FCC, IC, CE, Japan, Brazil	FCC, IC, CE, Japan, Brazil, Taiwan	FCC, IC, CE, Japan, Brazil, Taiwan, Korea

# FortiWiFi™ Firewall and WiFi Gateway

	FWF-30G	FWF-40F	FWF-50G	FWF-60F	FWF-70G	FWF-80F-2R
						
<b>Suggested Deployment</b>	Home/small office	Home/small office	Home/small office	Distributed office	Distributed office	Distributed office
<b>Hardware</b>						
<b>Form Factor</b>	Desktop, wall mountable	Desktop, wall mountable	Desktop, wall mountable	Desktop, wall mountable	Desktop, wall mountable	Desktop, wall mountable
<b>Dimension</b>	1.6 × 5.6 × 6.3 in	1.6 × 8.5 × 6.6in	1.7 × 8.5 × 7.0 in	1.5 × 8.5 × 6.3 in	1.6 × 8.5 × 6.3in	2.4 × 8.5 × 7 in
<b>Kensington Lock</b>	—	—	—	—	—	—
<b>Ethernet Interfaces</b>	1 x GE RJ45 WAN, 3 x GE RJ45 Switch ports	1 x GE RJ45 WAN, 4 x GE RJ45 Switch ports	1 x GE RJ45 WAN, 4 x GE RJ45 Switch ports	3 x GE RJ45 WAN/DMZ, 7 x GE RJ45 Switch ports	7 x GE RJ45 Ports, 2 x GE RJ45 WAN Ports, 1 x GE RJ45 DMZ Port	2 x RJ45/SFP shared media, 8 x GE RJ45 Switch ports
<b>Other WiFi Variants</b>	—	—	FWF-51E, FWF-50G-SFP, FWF- 50G-DSL, FWF-50G-5G-II	+ Storage (FWF-61F)	FWF-71G, FWF-70G-POE	+ Storage (FWF-81F-2R)
<b>Wireless</b>						
<b>IEEE Standard</b>	802.11a/b/g/n/ac/ax	802.11 a/b/g/n/ac-W2	802.11a/b/g/n/ac/ax	802.11 a/b/g/n/ac-W2	802.11a/b/g/n/ac/ax	802.11 a/b/g/n/ac/ax
<b>Number of Radios</b>	2	1	2	1	2	2 wifi + 1 scan
<b>Radio 1 Band (association rate)</b>	TBA	2.4GHz / 5GHz (450 / 1300Mbps)	TBA	2.4GHz / 5GHz (450 / 1300Mbps)	TBA	2.4 GHz (574 Mbps)
<b>Radio 2 Band (association rate)</b>	TBA	—	TBA	—	TBA	5.0 GHz (1201 Mbps)
<b>MIMO</b>	2×2	3×3	2×2	3×3	2×2	2×2
<b>Max / recommended number of concurrent clients</b>	128 / 30	128 / 30	128 / 30	128 / 30	128 / 30	128 / 30
<b>Antenna Type and Count</b>	TBA	3 di-pole antennas (RP-SMA)	TBA	3 di-pole antennas (RP-SMA)	TBA	3 di-pole antennas (RP-SMA)
<b>Antenna Gain</b>	TBA	4.2 dBi/(3.5dBi-5GHz)	TBA	4.2 dBi/(3.5dBi-5GHz)	TBA	4.5 dBi/(5.5dBi-5GHz)
<b>Max TX Power</b>	TBA	20dBm	TBA	20dBm	TBA	23 dBm
<b>Number of SSIDs</b>	8 (7 client, 1 monitor)	8 (7 client, 1 monitor)	8 (7 client, 1 monitor)	8 (7 client, 1 monitor)	8 (7 client, 1 monitor)	8 (7 client, 1 monitor)
<b>Traffic Queues</b>	4 queues	4 queues	4 queues	4 queues	4 queues	8 (7 client, 1 monitor)
<b>Rogue AP scanning</b>						
<b>Dual Band Scanning</b>	•	•	•	•	•	•
<b>Background Scan</b>	•	•	•	•	•	•
<b>Full-time dedicated monitor</b>	•	•	•	•	•	•
<b>Single Radio Dual band scanning</b>	•	•	•	•	•	•
<b>Management</b>						
<b>WebUI &amp; CLI</b>	•	•	•	•	•	•
<b>Max managed APs</b>	16	16	16	96	96	96
<b>Cloud deployment support</b>	•	•	•	•	•	•
<b>Certifications</b>						
<b>Wi-Fi Alliance Certified</b>						
<b>DFS Certified</b>						

\* Certification covers following specifications: - 802.11a/b/g/n, Short Guard Interval, TX A-MPDU, STBC, 40 MHz operation in 5 GHz/WPA™ Personal, WPA™ Enterprise /Personal, WPA2™ , Enterprise / Personal, WMM™, EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-FAST, 802.11 d/h, WMM Power Save..

\*\* Additional filtration added to reduce interference in 2.4GHz band from nearby cellular equipment.

# FortiGate/FortiWiFi® Wireless Controller (with FortiOS 7.4+)

	FortiGate/FortiWiFi 30 & 40 Series	FortiGate/FortiWiFi 60 & 70 Series	FortiGate/FortiWiFi 80 & 90 Series	FortiGate 100 Series	FortiGate 200 Series
<b>Hardware</b>					
Product Range / Form Factor	Entry / Desktop	Entry / Desktop	Entry / Desktop	Mid Range / 1 RU	Mid Range / 1 RU
GE PoE/PoE+ Interfaces	-	-	- / 8 (FG80/81F-POE)	-	-
<b>Capacity</b>					
Maximum Supported APs (Tunnel Mode)	8	32	48 - 64	64	128
Maximum Supported APs (Total)	16	64	96 - 128	128	256
Max number of SSIDs	16 - 32	16 - 32	16 - 32	256	256
Max CAPWAP throughput	3.5 Gbps	8 to 8.5 Gbps	9 to 23.6 Gbps	15 to 35 Gbps	20 Gbps
	FortiGate 400 Series	FortiGate 600 to 900 Series	FortiGate 1000 to 3000 Series	FG-4000 Series	FG-VM Series
<b>Hardware</b>					
Product Range / Form Factor	Mid Range / 1 RU	Mid Range / 1 RU	High End / 2-3 RU	High End / 3 RU	-
<b>Capacity</b>					
Maximum Supported APs (Tunnel Mode)	256	512 - 1,024	2,048	4,096	32 - 2,048
Maximum Supported APs (Total)	512	1,024 - 2,048	4,096 - 8,192	8,192	64 - 4,096
Max number of SSIDs	256	512	1,024 - 4,096	4,096	32 - 1,024
Max CAPWAP throughput	14.8 - 65 Gbps	18 Gbps - 70 Gbps	11 Gbps - 65 Gbps	47 - 63 Gbps	Refer to Data Sheet



This document is provided as a convenient comparison of Fortinet products and services. The datasheet for any product or service can be found on [www.fortinet.com](http://www.fortinet.com) should be consulted for the most updated specifications.

Copyright © 2025 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.