

FHRTINET₈

FortiGate 7000E Series

FG-7060E, FG-7040E, and FG-7030E



Highlights

Gartner Magic Quadrant Leader for both Network Firewalls and WAN Edge Infrastructure.

Secure Networking FortiOS delivers converged networking and security.

Unparalleled Performance with Fortinet's patented / SPU / vSPU processors.

Enterprise Security with consolidated AI / ML-powered FortiGuard Services.

Hyperscale Security

to secure any edge at any scale.

High Performance with Flexibility

The FortiGate 7000E Series delivers high performance security-driven networks to large enterprises and service providers that can weave security deep into their datacenter and across their hybrid IT architecture to protect any edge at any scale.

Powered by a rich set of AI/ML-based FortiGuard Services and an integrated security fabric platform, the FortiGate 7000E Series delivers coordinated, automated, end-to-end threat protection across all use cases.

The industry's first integrated Zero Trust Network Access (ZTNA) enforcement within an NGFW solution, FortiGate 7000E Series automatically controls, verifies, and facilitates user access to applications delivering consistent convergence with a seamless user experience.

| Model | IPS | NGFW | Threat Protection | Interfaces |
|------------|--------------|--------------|----------------------|---|
| 7060E-8/-9 | 120/200 Gbps | 100/120 Gbps | 80/96 Gbps | Multiple 10 GE SFP+/SFP, 40 GE QSFP+, 100 GE CFP2/QSFP28 |
| 7040E-8/-9 | 60/100 Gbps | 50/60 Gbps | 40/48 Gbps | Multiple 10 GE SFP+/SFP, 40 GE/ 100 GE QSFP28 |
| 7030-E | 60 Gbps | 50 Gbps | 35 GBps | Multiple 10 GE SFP+/SFP, 40 GE/100 GE QSFP28 |



Available in



Appliance



Virtual





Cloud



Container

FortiOS Everywhere

FortiOS, Fortinet's Advanced Operating System

FortiOS enables the convergence of high performing networking and security across the Fortinet Security Fabric. Because it can be deployed anywhere, it delivers consistent and context-aware security posture across network, endpoint, and multi-cloud environments.

FortiOS powers all FortiGate deployments whether a physical or virtual device, as a container, or as a cloud service. This universal deployment model enables the consolidation of many technologies and use cases into a simplified, single policy and management framework. Its organically built best-of-breed capabilities, unified operating system, and ultra-scalability allows organizations to protect all edges, simplify operations, and run their business without compromising performance or protection.

FortiOS dramatically expands the Fortinet Security Fabric's ability to deliver advanced Al/ ML-powered services, inline advanced sandbox detection, integrated ZTNA enforcement, and more, provides protection across hybrid deployment models for hardware, software, and Software-as-a-Service with SASE.

FortiOS expands visibility and control, ensures the consistent deployment and enforcement of security policies, and enables centralized management across large-scale networks with the following key attributes:

- Interactive drill-down and topology viewers that display real-time status
- On-click remediation that provides accurate and quick protection against threats and abuses
- Unique threat score system correlates weighted threats with users to prioritize investigations



Intuitive easy to use view into the network and endpoint vulnerabilities



Visibility with FOS Application Signatures

FortiConverter Service

FortiConverter Service provides hassle-free migration to help organizations transition from a wide range of legacy firewalls to FortiGate Next-Generation Firewalls quickly and easily. The service eliminates errors and redundancy by employing best practices with advanced methodologies and automated processes. Organizations can accelerate their network protection with the latest FortiOS technology.



FortiGuard Services

FortiGuard AI-Powered Security

FortiGuard's rich suite of security services counter threats in real time using Al-powered, coordinated protection designed by FortiGuard Labs security threat researchers, engineers, and forensic specialists.

Web Security

Advanced cloud-delivered URL, DNS (Domain Name System), and Video Filtering providing complete protection for phishing and other web born attacks while meeting compliance.

Additionally, its dynamic inline CASB (Cloud Access Security Broker) service is focused on securing business SaaS data, while inline ZTNA traffic inspection and ZTNA posture check provide per-sessions access control to applications. It also integrates with the FortiClient Fabric Agent to extend protection to remote and mobile users.

Content Security

Advanced content security technologies enable the detection and prevention of known and unknown threats and file-based attack tactics in real-time. With capabilities like CPRL (Compact Pattern Recognition Language), AV, inline Sandbox, and lateral movement protection make it a complete solution to address ransomware, malware, and credential-based attacks.

Device Security

Advanced security technologies are optimized to monitor and protect IT, IIoT, and OT (Operational Technology) devices against vulnerability and device-based attack tactics. Its validated near-real-time IPS intelligence detects, and blocks known and zero-day threats, provides deep visibility and control into ICS/OT/SCADA protocols, and provides automated discovery, segmentation, and pattern identification-based policies.

Advanced Tools for SOC/NOC

Advanced NOC and SOC management tools attached to your NGFW provide simplified and faster time-to-activation.

SOC-as-a-Service

Includes tier-one hunting and automation, log location, 24×7 SOC analyst experts, managed firewall and endpoint functions, and alert triage.

Fabric Rating Security Best Practices

Includes supply chain virtual patching, up-to-date risk and vulnerability data to deliver quicker business decisions, and remediation for data breach situations.



Secure Any Edge at Any Scale

Powered by Security Processing Unit (SPU)

Traditional firewalls cannot protect against today's content- and connection-based threats because they rely on off-the-shelf hardware and general-purpose CPUs, causing a dangerous performance gap. Fortinet's custom SPU processors deliver the power you need—up to 520Gbps—to detect emerging threats and block malicious content while ensuring your network security solution does not become a performance bottleneck.

ASIC Advantage



Network Processor 6 NP6

Fortinet's new breakthrough SPU NP6 network processor works in line with FortiOS functions delivering:

- Superior firewall performance for IPv4/IPv6, SCTP, and multicast traffic with ultra-low latency
- VPN, CAPWAP, and IP tunnel acceleration
- Anomaly-based intrusion prevention, checksum offload, and packet defragmentation
- Traffic shaping and priority queuing



Content Processor 9 CP9

Content Processors act as co-processors to offload resource-intensive processing of security functions. The ninth generation of the Fortinet Content Processor, the CP9, accelerates resource-intensive SSL (including TLS 1.3) decryption and security functions while delivering:

- Pattern matching acceleration and fast inspection of real-time traffic for application identification
- IPS pre-scan/pre-match, signature correlation offload, and accelerated antivirus processing



FortiCare Services

Fortinet is dedicated to helping our customers succeed, and every year FortiCare Services help thousands of organizations get the most from our Fortinet Security Fabric solution. Our lifecycle portfolio offers Design, Deploy, Operate, Optimize, and Evolve services. Operate services offer device-level FortiCare Elite service with enhanced SLAs to meet our customer's operational and availability needs. In addition, our customized account-level services provide rapid incident resolution and offer proactive care to maximize the security and performance of Fortinet deployments.



Use Cases

Next Generation Firewall (NGFW)

- FortiGuard Labs' suite of Al-powered Security Services—natively integrated with your NGFW—secures web, content, and devices and protects networks from ransomware and sophisticated cyberattacks
- Real-time SSL inspection (including TLS 1.3) provides full visibility into users, devices, and applications across the attack surface
- Fortinet's patented SPU (Security Processing Unit) technology provides industry-leading high-performance protection



Segmentation

- Dynamic segmentation adapts to any network topology to deliver true end-to-end security—from the branch to the datacenter and across multi-cloud environments
- Ultra-scalable, low latency, VXLAN segmentation bridges physical and virtual domains with Layer 4 firewall rules
- Prevents lateral movement across the network with advanced, coordinated protection from FortiGuard Security Services detects and prevents known, zero-day, and unknown attacks



Secure SD-WAN

- FortiGate WAN Edge powered by one OS and unified security and management framework and systems transforms and secures WANs
- Delivers superior quality of experience and effective security posture for work-from-any where models, SD-Branch, and cloud-first WAN use cases
- Achieve operational efficiencies at any scale through automation, deep analytics, and self-healing



Mobile Security for 4G, 5G, and IoT

- SPU-accelerated, high performance CGNAT and IPv6 migration options, including: NAT44, NAT444, NAT64/ DNS64, NAT46 for 4G Gi/sGi, and 5G N6 connectivity and security
- RAN Access Security with highly scalable and highest-performing IPsec aggregation and control Security Gateway (SecGW)
- User plane security enabled by full threat protection and visibility into GTP-U inspection


FortiClient

TANA / VPN


FortiClient

</t

Datacenter Deployment (NGFW, IPS, Segmentation)




Hardware



FortiGate 7060E

Next Generation eight-unit, 19-inch, six-slot rack mount chassis supporting up to four Fortinet Processor Modules (FPM) and two Fortinet Interface Modules (FIM).



FortiGate 7040E and 7030E

The FG-7040E is a Next Generation six-unit, 19-inch, four-slot rack mount chassis with two Fortinet Processor Modules (FPM) and two Fortinet Interface Modules (FIM). The FG-7030E three-slot rack mount chassis comes with two FPM and one bundled FIM.

| FORTIGATE | 7060E-8 / 7060E-9-(DC)* | 7040E-8 / 7040E-9-(DC) | 7030E | |
|---|---|---|---|--|
| Hardware Specifications | | | | |
| Fortinet Processor Module (FPM) Slots | 4 | 2 | 2 | |
| Fortinet Interface Module (FIM) Slots | 2 | 2 | 1 | |
| Shelf Manager | 2 | 1 | 1 | |
| System Performance and Capacity | | | | |
| Firewall Throughput (1518 / 512 / 64 byte, UDP) | 630 / 630 / 340 Gbps | 315 / 310 / 200 Gbps | 155 / 155 / 155 Gbps | |
| Firewall Latency (64 byte, UDP) | 7.00 µs | 7.00 µs | 7.00 µs | |
| Firewall Throughput (Packet per Second) | 510 Mpps | 300 Mpps | 220 Mpps | |
| Concurrent Sessions (TCP) | 320 Million | 160 Million | 160 Million | |
| New Sessions/Sec (TCP) | 1.8 Million | 950 000 | 900 000 | |
| Firewall Policies | 200 000 | 200 000 | 200 000 | |
| IPsec VPN Throughput (512 byte) | 100 Gbps | 100 Gbps | 40 Gbps | |
| Gateway-to-Gateway IPsec VPN Tunnels | 16 000 | 16 000 | 16 000 | |
| Client-to-Gateway IPsec VPN Tunnels | 64 000 | 64 000 | 64 000 | |
| SSL-VPN Throughput | 15 Gbps | 15 Gbps | 15 Gbps | |
| Concurrent SSL-VPN Users (Recommended Maximum) | 48 000 | 48 000 | 48 000 | |
| IPS Throughput (Enterprise Mix) ¹ | 120 / 200 Gbps | 60 / 100 Gbps | 60 Gbps | |
| SSL Inspection Throughput ² | 79.9 / 120 Gbps | 39.9 / 60 Gbps | 39.9 Gbps | |
| SSL Inspection CPS (IPS, avg. HTTPS) ³ | 47 000 | 32 500 | 32 500 | |
| SSL Inspection Concurrent Session (IPS, avg. HTTPS) $^{\scriptscriptstyle 3}$ | 24 Million | 12 Million | 12 Million | |
| Application Control Throughput ³ | 160 Gbps | 80 Gbps | 65 Gbps | |
| NGFW Throughput ⁴ | 100 / 120 Gbps | 50 / 60 Gbps | 50 Gbps | |
| Threat Protection Throughput 5 | 80 / 96 Gbps | 40 / 48 Gbps | 35 Gbps | |
| CAPWAP Throughput | N/A | N/A | N/A | |
| Virtual Domains (Default / Maximum) | 10 / 500 | 10 / 500 | 10 / 500 | |
| Maximum Number of FortiSwitches Supported | 256 | 256 | 256 | |
| Maximum Number of FortiAPs (Total / Tunnel Mode) | N/A | N/A | N/A | |
| High Availability Configurations | Active-Active (FGSP), Active-Passive, Clustering | Active-Active (FGSP), Active-Passive, Clustering | Active-Active (FGSP), Active-Passive, Clustering | |

Specifications

| FORTIGATE | 7060E-8 / 7060E-9-(DC)* | 7040E-8 / 7040E-9-(DC) | 7030E |
|--|---|--|---|
| Dimensions | | | |
| Height x Width x Length (inches) | 14.0 × 17.3 × 25.6 | 10.5 × 17.3 × 25.6 | 10.5 × 17.3 × 25.6 |
| Height x Width x Length (mm) | 355.6 × 440 × 651 | 266.7 × 440 × 650 | 266.7 × 440 × 650 |
| Weight | 210.2 lbs (95.4 kg) | 153.3 lbs (69.6 kg) | 134.9 lbs (61.3 kg) |
| Form Factor (supports EIA/non-EIA standards) | 8 RU | 6 RU | 6 RU |
| Power and Environment | | | |
| Power Required | AC (configured with 4 PSUs in a 3+1 redundant configuration, an additional 2 PSUs can be added for additional redundancy) | AC (configured with 3 PSUs in a 2+1 redundant configuration, an additional PSU can be added for additional redundancy) | AC (configured with 3 PSUs in a 2+1 redundant configuration, an additional PSU can be added for additional redundancy) |
| Power Consumption (Maximum / Average) ** | 3277 / 2330 W | 2500 / 1800 W | 1940 / 1390 W |
| AC Current (Maximum) | 12A@100V, 10A@240V | 12A@100V, 10A@240V | 12A@100V, 10A@240V |
| Heat Dissipation (Maximum) ** | 11 184 BTU/h | 8530 BTU/h | 6619 BTU/h |
| DC Power Supply | -48V DC | -48V DC | - |
| DC Current (Maximum) | 30A per feed (3+3) | 30A per feed (2+2) | - |
| Operating Temperature | 32°-104°F (0°-40°C) | 32°-104°F (0°-40°C) | 32°-104°F (0°-40°C) |
| Storage Temperature | -31°-158°F (-35°-70°C) | -31°-158°F (-35°-70°C) | -31°-158°F (-35°-70°C) |
| Humidity | 20%–90% non-condensing | 20%–90% non-condensing | 20%–90% non-condensing |
| Compliance | | | |
| Certifications | FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB | FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB | FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB |

* Performance specifications for FG-7060 are based on 4 FPM combination.

** Based on all default included components.

Note: All performance values are "up to" and vary depending on system configuration. IPsec VPN performance is based on 512 byte UDP packets using AES-256+SHA1. 1. IPS performance is measured using 1 Mbyte HTTP and Enterprise Traffic Mix. 2. SSL Inspection is measured with IPS enabled and HTTP traffic, using TLS v1.2 with AES256-SHA. 3. Application Control performance is measured with 64 Kbytes HTTP traffic. 4. NGFW performance is measured with IPS and Application Control enabled, based on Enterprise Traffic Mix. 5. Threat Protection performance is measured with IPS and Application Control enabled, based on Enterprise Traffic Mix. 5. Threat Protection enabled, based on Enterprise Traffic Mix. 5. Threat Protection performance is measured with IPS and Application Control and Malware protection enabled, based on Enterprise Traffic Mix.

CP9

Secure

NP

For complete, up-to-date and detailed feature set, please refer to the Administration Handbook and FortiOS Datasheet.

Modules

Fortinet Processor Module 7620E


The latest purpose-built SPU CP9 accelerated processor module with superior content processing

throughput and protection. The device runs on $\ensuremath{\mathsf{FortiOS}}$ –

|--|

| Power and Environment | FG-7620E | | | |
|---|--|--|--|--|
| Power Consumption (Average/Maximum) | 320 / 410 W | | | |
| Heat Dissipation (Average) | 1395 BTU/h | | | |
| Operating Temperature | 32°-104°F (0°-40°C) | | | |
| Storage Temperature | -31°-158°F (-35°-70°C) | | | |
| Humidity | 20%–90% non-condensing | | | |
| Compliance | | | | |
| Certifications | FCC, ICES, CE, RCM, VCCI, BSMI, UL/ cUL, CB | | | |
| Status, Alarm, and Power LEDS Power Slider Button | Power Slider | | | |








The latest purpose-built SPU CP9 accelerated processor module with superior content processing throughput and protection. The device runs on FortiOS — the most powerful security operating system in the world.


| the most powerful security operating system in the world. | | | | | | |
|---|--|--|--|--|--|--|
| Power and Environment | FG-7630E | | | | | |
| Power Consumption (Average/Maximum) | 320 / 410 W | | | | | |
| Heat Dissipation (Average) | 1395 BTU/h | | | | | |
| Operating Temperature | 32°-104°F (0°-40°C) | | | | | |
| Storage Temperature | -31°-158°F (-35°-70°C) | | | | | |
| Humidity | 20%-90% non-condensing | | | | | |
| Compliance | | | | | | |
| Certifications | FCC, ICES, CE, RCM, VCCI, BSMI, UL/ cUL, CB | | | | | |
| Status, Alarm, and Power LEDS | | | | | | |



Modules

Fortinet Interface Module 7901E

High-performance, SPU DP2 accelerated networking blade with 32x GE/10 GE SFP/+ slots.

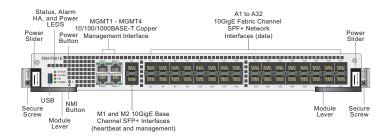

Fortinet Interface Module 7904E

High-performance, SPU DP2 accelerated networking blade with 8× 40 GE QSFP+ slots.


Status, Alarm HA, and Power LEDS B1 to B8 40GigE Fabric Channel QSFP Network MGMT1 - MGMT4 10/100/1000BASE-T Copper er Management Interface Power Slider Power Slider . Power Button Interfaces (data) 0 1 USB NMI Module Lever Secure Screw M1 and M2 10GigE Base Channel SFP+ Interfaces (heartbeat and management) Secure Screw Module Lever

Fortinet Interface Module 7910E

High-performance, SPU DP2 accelerated networking blade with 4× 100 GE CFP2 slots.

Fortinet Interface Module 7920E

High-performance, SPU DP2 accelerated networking blade with $4 \times 100 \text{ GE QSFP28 slots.}$

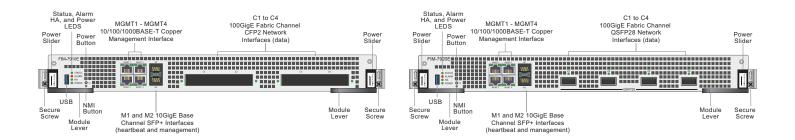

| | FIM-7901E | FIM-7904E | FIM-7910E | FIM-7920E |
|---------------------------------------|---|---|---|---|
| Interfaces | | | | |
| Network Interfaces | 32x GE/10 GE SFP/+ | 8× 40 GE QSFP+ | 4× 100 GE CFP2 | 4× 100 GE QSFP28 |
| Base Channel Interfaces | 2× 10 GE SFP+ | 2× 10 GE SFP+ | 2× 10 GE SFP+ | 2×10 GE SFP+ |
| Management Interfaces | 4x GE RJ45 | 4x GE RJ45 | 4x GE RJ45 | 4x GE RJ45 |
| Included Transceivers | 2x SFP+ SR | 2x SFP+ SR | 2x SFP+ SR | 2x SFP+ SR |
| Power and Environment | | | | |
| Power Consumption (Average / Maximum) | 260 / 450 W | 260 / 450 W | 260 / 450 W | 410 / 460 W |
| Heat Dissipation | 1531 BTU/h | 1531 BTU/h | 1531 BTU/h | 1565 BTU/h |
| Operating Temperature | 32°-104°F (0°-40°C) | 32°-104°F (0°-40°C) | 32°-104°F (0°-40°C) | 32°-104°F (0°-40°C) |
| Storage Temperature | -31°-158°F (-35°-70°C) | -31°-158°F (-35°-70°C) | -31°-158°F (-35°-70°C) | -31°-158°F (-35°-70°C) |
| Humidity | 20%-90% non-condensing | 20%-90% non-condensing | 20%-90% non-condensing | 20%-90% non-condensing |
| Compliance | | | | |
| Certifications | FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB |

Bundle Matrix

| SKU | Components | | | | | |
|-----------------|-----------------------------|--|--|--|-------------------------|--|
| Bundle | Chassis | Processing Module | I/O Module 1 | I/O Module 2 | Power Supplies | Services and Licenses |
| FG-7030E-SFP10G | FG-7030E (2x FPMs, 1x FIM) | 2x FPM-7620E | Select from FIM-7901E-C, FIM-7904E-C, FIM-7910E-C, FIM-7920E-C | Select from FIM-7901E-C, FIM-7904E-C, FIM-7910E-C, FIM-7920E-C | 3x PSU, 1x PSU Optional | |
| FG-7030E-QSFP28 | FG-7030E (2x FPMs, 1x FIM) | 2x FPM-7620E | Select from FIM-7901E-C, FIM-7904E-C, FIM-7910E-C, FIM-7920E-C | Select from FIM-7901E-C, FIM-7904E-C, FIM-7910E-C, FIM-7920E-C | 3x PSU, 1x PSU Optional | Chassis-based pricing — Individual and bundled FortiGuard security services and FortiCare support subscription services: Threat Protection Bundle, UTM Bundle, Enterprise |
| FG-7040E-8 | FG-7040E (2x FPMs, 2x FIMs) | 2x FPM-7620E | Select from FIM-7901E-C, FIM-7904E-C, FIM-7910E-C, FIM-7920E-C | Select from FIM-7901E-C, FIM-7904E-C, FIM-7910E-C, FIM-7920E-C | 3x PSU, 1x PSU Optional | Bundle and FortiCare360 Chassis-based pricing — Add on licenses st as VDOM and Endpoint Compliance |
| FG-7060E-8 | FG-7060E (2x FPMs, 2x FIMs) | 2x FPM-7630E 2x FPM-7630E Optional | Select from FIM-7901E-C, FIM-7904E-C, FIM-7910E-C, FIM-7920E-C | Select from FIM-7901E-C, FIM-7904E-C, FIM-7910E-C, FIM-7920E-C | 4x PSU, 2x PSU Optional | |

NOTE: FIM-79XXE-C are only meant to be used with the FG7040E-8/FG-7040E-8-DC/FG7060E-8/FG7060E-8/FG7060E-8-DC Bundles. Please use FIM-79XXE for ordering spares.

Ordering Information

| Product | SKU | Description |
|---|---------------------|--|
| FortiGate 7030E-SFP10G | FG-7030E-SFP10G | 6U 3-slot chassis with 2x FPM-7620E processor modules, 1x FIM-7901E module with 32× 10 GE SFP+ slots, 1x manager module, and 3x hot swappable redundant PSU. |
| FortiGate 7030E-QSFP28 | FG-7030E-QSFP28 | 6U 3-slot chassis with 2x FPM-7620E processor modules, 1x FIM-7920E module with 4× 100 GE QSFP28 slots, 1x manager module, and 3x hot swappable redundant PSU. |
| FortiGate 7040E-8 | FG-7040E-8 | 6U 4-slot chassis with 2x FPM-7620E processor modules, 2x FIM-79xxE-C specified at purchase, 1x manager module and 3x hot swappable redundant PSU. |
| FortiGate 7040E-8-DC | FG-7040E-8-DC | 6U 4-slot chassis with 2x FPM-7620E processor modules, 2x FIM-79xxE-C specified at purchase, 1x manager |
| | | module and 3x hot swappable redundant DC PSU. |
| FortiGate 7040E-9 | FG-7040E-9 | 6U 4-slot chassis with 2x FPM-7630E processor modules, 2x FIM-79xxE-C specified at purchase, 1x manager module and 3x hot swappable redundant PSU. |
| FortiGate 7040E-9-DC | FG-7040E-9-DC | 6U 4-slot chassis with 2x FPM-7630E processor modules, 2x FIM-79xxE-C specified at purchase, 1x manager |
| | | module and 3x hot swappable redundant DC PSU. |
| FortiGate 7060E-8 | FG-7060E-8 | 8U 6-slot chassis with 2x FPM-7620E processor modules, 2x FIM-79xxE-C specified at purchase, 2x manager module and 4x hot swappable redundant PSU. |
| FortiGate 7060E-8-DC | FG-7060E-8-DC | 8U 6-slot chassis with 2x FPM-7620E processor modules, 2x FIM-79xxE-C specified at purchase, 2x manager modules and 4x hot swappable redundant DC-DC PSU. |
| FortiGate 7060E-9 | FG-7060E-9 | 8U 6-slot chassis with 2x FPM-7630E processor modules, 2x FIM-79xxE-C specified at purchase, 2x manager module and 4x hot swappable redundant PSU. |
| FortiGate 7060E-9-DC | FG-7060E-9-DC | 8U 6-slot chassis with 2x FPM-7630E processor modules, 2x FIM-79xxE-C specified at purchase, 2x manager modules and 4x hot swappable redundant DC-DC PSU. |
| FortiGate 7060E-DC Chassis | FG-7060E-DC-Chassis | FG-7060E chassis including 2x system management modules, 3x fan modules and 4x DC PSU. |
| Training | | |
| FortiGate Chassis-based Firewall Platform (FGT 7000) Training - two days | FT-FGT-CHS | Course description: <u>https://training.fortinet.com/local/staticpage/view.php?page=library_fortigate-7000-series</u> |
| (FOT 7000) fraining - two days | | Upcoming sessions: https://training.fortinet.com/calendar/view.php/Course:FortiGate_7000_Series |
| | | Price includes lab access and course material (Lab and Study guides). Exam voucher not included. |

* Each FIM is packed individually and comes with 2× 10 GE SFP+ SR transceivers at no charge.

NOTE: All optional/spare components are for replacement usage and should not be used to assemble a bundle as only bundles have the necessary subscriptions.

Subscriptions

| | Service Offering | A-la-carte | Bundles | | | |
|-------------------------------|--|--------------------------------------|-----------------------|------------------------------|-------------------------------|--|
| Service Category | | | Enterprise Protection | Unified Threat Protection | Advanced Threat Protection | |
| Security Services | FortiGuard IPS Service | • | • | • | • | |
| | FortiGuard Anti-Malware Protection (AMP) — Antivirus, Mobile Malware, Botnet, CDR, Virus Outbreak Protection and FortiSandbox Cloud Service | • | • | • | • | |
| | FortiGuard Web Security — URL and web content, Video and Secure DNS Filtering | • | • | • | | |
| | FortiGuard Anti-Spam | | • | • | | |
| | FortiGuard IoT Detection Service | • | • | | | |
| | FortiGuard Industrial Security Service | • | • | | | |
| | FortiCloud AI-based Inline Sandbox Service ¹ | • | | | | |
| NOC Services | FortiGate Cloud (SMB Logging + Cloud Management) | • | | | | |
| | FortiGuard Security Fabric Rating & Compliance Monitoring Service | • | • | | | |
| | FortiConverter Service | • | • | | | |
| | FortiGuard SD-WAN Underlay Bandwidth and Quality Monitoring Service | • | | | | |
| SOC Services | FortiAnalyzer Cloud | • | | | | |
| | FortiAnalyzer Cloud with SOCaaS | • | | | | |
| Hardware and Software Support | FortiCare Essentials | • | | | | |
| | FortiCare Premium | • | • | • | • | |
| | FortiCare Elite | • | | | | |
| Base Services | FortiGuard Application Control | | | | | |
| | FortiCloud ZTNA Inline CASB Service ¹ | included with FortiCare Subscription | | | | |
| | Internet Service (SaaS) DB Updates | | | | | |
| | GeoIP DB Updates | | | | | |
| | Device/OS Detection Signatures | | | | | |
| | Trusted Certificate DB Updates | | | | | |
| | DDNS (v4/v6) Service | | | | | |

FortiGuard Bundles

FortiGuard Labs delivers a number of security intelligence services to augment the FortiGate firewall platform. You can easily optimize the protection capabilities of your FortiGate with one of these FortiGuard Bundles.


FortiCare Elite

FortiCare Elite services offers enhanced service-level agreements (SLAs) and accelerated issue resolution. This advanced support offering provides access to a dedicated support team. Single-touch ticket handling by the expert technical team streamlines resolution. This option also provides Extended End-of-Engineering-Support (EoE's) of 18 months for added flexibility and access to the new FortiCare Elite Portal. This intuitive portal provides a single unified view of device and security health.

Fortinet CSR Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the Fortinet EULA and report any suspected violations of the EULA via the procedures outlined in the Fortinet Whistleblower Policy.

1. Available when running FortiOS 7.2

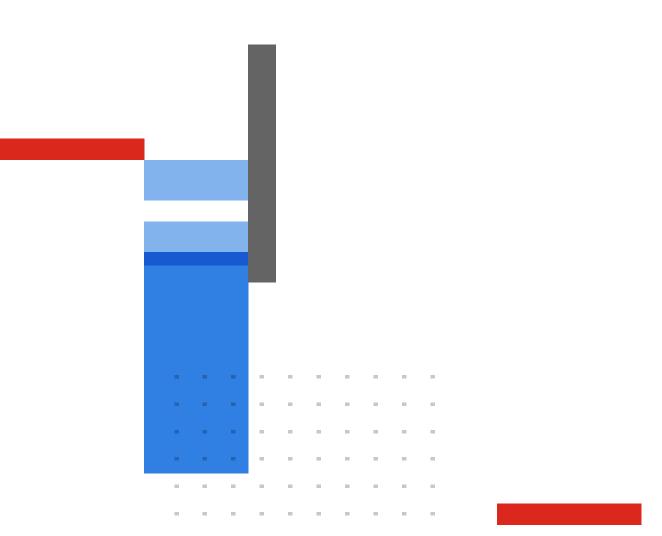

F;RTINET

www.fortinet.com

Copyright © 2023 Fortinet, Inc. All rights reserved. FortilGate⁶, FortiCare⁶ and FortilGate⁶, FortiCare⁶ and FortilGate⁶, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Tortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform accerding to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.