

FortiExtender Accessories



Features

IP67 Rated Waterproof Enclosure

RoHS and REACH Compliant

Optimize wireless coverage and performance

These antennas can help to optimize coverage and overall wireless performance in a range of installation settings. Antennas come in a variety of patterns and with various numbers of antenna elements to help installers find the best match for their equipment.

SKU	PATTERN	GAIN	LEADS	APPLICATION
FANT-3IN1-TG-5M-FEV	Omni			vehicle roof or outdoor
FANT-5IN1-TG-5M-FEV	Omni			vehicle roof or outdoor
FANT-7IN1-TG-5M-FEV	Omni			vehicle roof or outdoor

FANT-3IN1-TG-5M-FEV

Vehicle Rooftop or Outdoor Install Antenna

The FANT-3IN1-TG-5M-FEV is a three-in-one 5G/LTE/GNSS permanent mount antenna with 5m long low loss antenna cable for vehicle roof or fixed outdoor applications. It has a fully IP67 rated waterproof and weather robust Polycarbonate (PC) enclosure and base. The three antennas inside support 5G/4G LTE and GPS/GLONASS/BeiDou/Galileo. The FANT-3IN1-TG-5M-FEV delivers powerful MIMO antenna technology for 5G/4G LTE and an optimized patch antenna of GPS/GLONASS/BeiDou/Galileo for location positioning.

Features

- 2× 5G/4G LTE (600 MHz - 6 GHz) MIMO Antenna
- 1x active GNSS antenna of GPS/ GLONASS/ BeiDou/ Galileo with front end SAW filter and low-noise amplifier
- 5m long low loss and high efficiency/ peak gain outdoor antenna cable (300 mm RG-174 cable + 4700 mm TGC-200 cable) with SMA male connectors
- IP67 Rated Waterproof Enclosure
- RoHS and REACH Compliant



FANT-3IN1-TG-5M-FEV 5G/LTE Antenna Performance

5G/4G ANTENNA											
Frequency (MHz)		5G NR Band 71	LTE700	GSM 850/900	5G NR Band	DCS	PCS	UMTS1	LTE2600	5G NR Band 77, 78, 79	LTE5200 Wi-Fi 5800
		617 ~698	698 ~824	824 ~960	1427 ~1518	1710 ~1880	1850 ~1990	1920 ~2170	2300 ~2690	3300 ~3800	5150 ~5925
Efficiency (%)											
MIMO 1	5m	21.5	22.7	40.5	33.8	37.2	26.1	23.7	29.5	37.0	33.8
MIMO 2	5m	18.5	23.2	38.6	34.2	35.9	25.6	23.4	28.4	37.1	32.8
Average Gain (dB)											
MIMO 1	5m	-6.67	-6.45	-3.92	-4.71	-4.30	-5.83	-6.26	-5.30	-4.32	-4.71
MIMO 2	5m	-7.32	-6.35	-4.13	-4.66	-4.45	-5.92	-6.31	-5.46	-4.30	-4.84
Peak Gain (dBi)											
MIMO 1	5m	-1.92	-0.37	2.96	2.22	2.72	0.23	0.03	2.24	4.28	3.33
MIMO 2	5m	-2.48	-0.56	2.44	2.08	3.07	0.38	0.03	2.28	4.26	3.20
Impedance		50 Ω									
Polarization		Linear									
Radiation Pattern		Omni									
Max. input power		10W									



FANT-3IN1-TG-5M-FEV GNSS Antenna Performance

GNSS NAME	GPS	GLONASS	BeiDou	Galileo
COVERED BANDS	L1 (1575.42 MHz)	L1CR (1575.42 MHz) L1PT (1602 MHz)	B1 (1561 MHz)	E2 (1561 MHz) L1 (1575.42 MHz)
GNSS ELECTRICAL				
Frequency (MHz)		1561	1575.42	1602
VSWR (max.)		2.5	2.5	2.5
Passive Antenna Efficiency (%) (without cable loss)		40.02	48.39	44.29
Passive Antenna Gain at Zenith (dBic) (without cable loss)		3.75	4.44	4.54
Axial Ratio (dB)		20	11	15
Polarization			RHCP	
Impedance			50 Ω	
Cable			RG-174	
Connector			SMA (M)	

FANT-3IN1-TG-5M-FEV Active GNSS Antenna LNA and SAW Filter

LNA and Filter Electrical Properties				
Frequency (MHz)	1561	1575.42	1602	
VSWR (max.)	2.0:1	2.0:1	2.0:1	
Gain@1.8V (dBic)	28.8 dB	28.8 dB	28 dB	
Gain@3.0V (dBic)	29 dB	29 dB	28.3 dB	
Gain@5.5V (dBic)	29.6 dB	29.4 dB	28.7 dB	
Noise@1.8V (dB)	2.8 dB	2.3 dB	2.8 dB	
Noise@3.0V (dB)	2.8 dB	2.2 dB	2.8 dB	
Noise@5.5V (dB)	2.9 dB	2.3 dB	2.8 dB	
Power consumption@1.8V (mA)		8.7 mA		
Power consumption@3.0V (mA)		9.0 mA		
Power consumption@5.5V (mA)		11 mA		

FANT-3IN1-TG-5M-FEV Total Specification (Through Antenna, SAW Filter, and LNA)

Total Specification (Through Antenna, SAW Filter, and LNA)				
Frequency (MHz)	1561	1575.42	1602	
Gain@3V (dBic)	31.7 $\pm$ 3	32.4 $\pm$ 3	32.4 $\pm$ 3	
Output Impedance		50 Ω		



FANT-3IN1-TG-5M-FEV Antenna 5G/LTE/3G Bands

5G/4G Bands			
5G NR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA			
Band Number	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓
12	UL: 699 to 716	DL: 729 to 746	✓
13	UL: 777 to 787	DL: 746 to 756	✓
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746	✓
18	UL: 815 to 830	DL: 860 to 875	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓
22	UL: 3410 to 3490	DL: 3510 to 3590	✓
23	UL: 2000 to 2020	DL: 2180 to 2200	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869	✓
28	UL: 703 to 748	DL: 758 to 803	✓
29	UL: to	DL: 717 to 728	✓
30	UL: 2305 to 2315	DL: 2350 to 2360	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5	✗
32	UL: to	DL: 1452 to 1496	✓
35		1850 to 1910	✓
38		2570 to 2620	✓
39		1880 to 1920	✓
40		2300 to 2400	✓
41		2496 to 2690	✓
42		3400 to 3600	✓
43		3600 to 3800	✓
48		3550 to 3700	✓
66	UL: 1710 to 1780	DL: 2110 to 2200	✓
71		617 to 698	✓
74/75/76		1427 to 1518	✓
78		3300 to 3800	✓
79		4400 to 5000	✓

* Covered Bands represent greater than 20% efficiency.



FANT-5IN1-TG-5M-FEV

Vehicle Rooftop or Outdoor Install Antenna

The FANT-5IN1-TG-5M-FEV is a 5-in-1 5G/4G-LTE/GNSS permanent mount antenna with 5m long low loss antenna cable for vehicle roof or fixed outdoor applications. It has a fully IP67 rated waterproof and weather robust Polycarbonate (PC) enclosure and base. The five antennas inside support 5G/4G LTE and GPS/GLONASS/BeiDou/Galileo. The FANT-5IN1-TG-5M-FEV delivers powerful MIMO antenna technology for 5G/4G LTE and an optimized patch antenna of GPS/GLONASS/BeiDou/Galileo for location positioning.

Features

- 4 × 5G/4G LTE (600MHz - 6GHz) MIMO Antenna
- 1 x active GNSS antenna of GPS/GLONASS/BeiDou/Galileo with front end SAW filter and low-noise amplifier.
- 5m long low loss and high efficiency/peak gain outdoor antenna cable (300mm RG-174LL cable + 4700mm TGC-200 cable) with SMA male connectors
- IP67 Rated Waterproof Enclosure
- RoHS and REACH Compliant



FANT-5IN1-TG-5M-FEV 5G/LTE Antenna Performance

5G/4G ANTENNA											
Frequency (MHz)		5G NR Band 71	LTE700	GSM 850/900	5G NR Band	DCS	PCS	UMTS1	LTE2600	5G NR Band 77, 78, 79	LTE5200 Wi-Fi 5800
		617 ~698	698 ~824	824 ~960	1427 ~1518	1710 ~1880	1850 ~1990	1920 ~2170	2300 ~2690	3300 ~3800	5150 ~5925
Efficiency (%)											
MIMO 1	5m	21.5	22.7	40.5	33.8	37.2	26.1	23.7	29.5	37.0	33.8
MIMO 2	5m	18.5	23.2	38.6	34.2	35.9	25.6	23.4	28.4	37.1	32.8
MIMO 3	5m	18.3	24.2	26.9	35.4	37.9	32.3	29.9	37.1	23.4	30.7
MIMO 4	5m	20.1	23.6	25.8	36.7	37.0	32.9	30.9	36.4	22.3	33.1
Average Gain (dB)											
MIMO 1	5m	-6.67	-6.45	-3.92	-4.71	-4.30	-5.83	-6.26	-5.30	-4.32	-4.71
MIMO 2	5m	-7.32	-6.35	-4.13	-4.66	-4.45	-5.92	-6.31	-5.46	-4.30	-4.84
MIMO 3	5m	-7.37	-6.16	-5.70	-4.51	-4.22	-4.91	-5.24	-4.31	-6.31	-5.13
MIMO 4	5m	-6.96	-6.26	-5.88	-4.36	-4.31	-4.83	-5.10	-4.39	-6.51	-4.81
Peak Gain (dBi)											
MIMO 1	5m	-1.92	-0.37	2.96	2.22	2.72	0.23	0.03	2.24	4.28	3.33
MIMO 2	5m	-2.48	-0.56	2.44	2.08	3.07	0.38	0.03	2.28	4.26	3.20
MIMO 3	5m	-2.19	-1.41	0.47	2.04	3.29	1.64	1.69	3.19	1.61	2.87
MIMO 4	5m	-2.14	-1.54	0.05	2.13	2.97	1.62	1.25	3.40	1.03	3.57
Impedance		50 Ω									
Polarization		Linear									
Radiation Pattern		Omni									
Max. input power		10W									



FANT-5IN1-TG-5M-FEV GNSS Antenna Performance

GNSS Name	GPS	GLONASS	BeiDou	Galileo	Compass	SBAS
COVERED BANDS	L1 (1575.42MHz)	L1CR (1575.42MHz) L1PT (1602MHz)	B1 (1561MHz)	E2 (1561MHz) L1 (1575.42MHz)	E2 (B1) 1561MHz	WAAS/EGN OS 1575.42MHz

GNSS ELECTRICAL				
Frequency (MHz)	1561	1575.42	1602	
VSWR (max.)	2.5	2.5	2.5	
Passive Antenna Efficiency (%) (without cable loss)	40.02	48.39	44.29	
Passive Antenna Gain at Zenith (dBic) (without cable loss)	3.75	4.44	4.54	
Axial Ratio (dB)	20	11	15	
Polarization		RHCP		
Impedance		50 Ω		
Cable		RG-174		
Connector		SMA (M)		

FANT-5IN1-TG-5M-FEV Active GNSS Antenna LNA and SAW Filter

LNA and Filter Electrical Properties				
Frequency (MHz)	1561	1575.42	1602	
VSWR (max.)	2.0:1	2.0:1	2.0:1	
Gain@1.8V (dBic)	28.8 dB	28.8 dB	28 dB	
Gain@3.0V (dBic)	29 dB	29 dB	28.3 dB	
Gain@5.5V (dBic)	29.6 dB	29.4 dB	28.7 dB	
Noise@1.8V (dB)	2.8 dB	2.3 dB	2.8 dB	
Noise@3.0V (dB)	2.8 dB	2.2 dB	2.8 dB	
Noise@5.5V (dB)	2.9 dB	2.3 dB	2.8 dB	
Power consumption@1.8V (mA)		8.7 mA		
Power consumption@3.0V (mA)		9.0 mA		
Power consumption@5.5V (mA)		11 mA		

FANT-5IN1-TG-5M-FEV Total Specification (Through Antenna, SAW Filter, and LNA)

Total Specification (Through Antenna, SAW Filter, and LNA)				
Frequency (MHz)	1561	1575.42	1602	
Gain@3V (dBic)	31.7 ±3	32.4 ±3	32.4 ±3	
Output Impedance		50 Ω		



FANT-5IN1-TG-5M-FEV Antenna 5G/4G Bands

5G/4G Bands			
5G NR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA			
Band Number	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓
12	UL: 699 to 716	DL: 729 to 746	✓
13	UL: 777 to 787	DL: 746 to 756	✓
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746	✓
18	UL: 815 to 830	DL: 860 to 875	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓
22	UL: 3410 to 3490	DL: 3510 to 3590	✓
23	UL: 2000 to 2020	DL: 2180 to 2200	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869	✓
28	UL: 703 to 748	DL: 758 to 803	✓
29	UL: -	DL: 717 to 728	✓
30	UL: 2305 to 2315	DL: 2350 to 2360	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5	✗
32	UL: -	DL: 1452 - 1496	✓
35		1850 to 1910	✓
38		2570 to 2620	✓
39		1880 to 1920	✓
40		2300 to 2400	✓
41		2496 to 2690	✓
42		3400 to 3600	✓
43		3600 to 3800	✓
48		3550 to 3700	✓
66	UL: 1710 to 1780	DL: 2110 to 2200	✓
71		617 to 698	✓
74/75/76		1427 to 1518	✓
78		3300 to 3800	✓
79		4400 to 5000	✓

* Covered Bands represent greater than 20% efficiency.



FANT-7IN1-TG-5M-FEV

Vehicle Rooftop or Outdoor Install Antenna

The FANT-7IN1-TG-5M-FEV is a 7-in-1 5G/4G-LTE/Wi-Fi/GNSS permanent mount antenna with 5m long low loss antenna cable for vehicle roof or fixed outdoor applications. It has a fully IP67 rated waterproof and weather robust Polycarbonate (PC) enclosure and base. The 7 antennas inside support 5G/4G LTE, Wi-Fi and GPS/GLONASS/BeiDou/Galileo. The FANT-7IN1-TG-5M-FEV delivers powerful MIMO antenna technology for 5G/4G LTE, an optimized patch antenna of GPS/GLONASS/BeiDou/Galileo for location positioning and Wi-Fi Client connectivity.

Features

- 4× 5G/4G LTE (600MHz - 6GHz) MIMO Antenna
- 2x Wi-Fi 2.4GHz/5.8GHz MIMO Antenna
- 1x active GNSS antenna of GPS/GLONASS/BeiDou/Galileo with front end SAW filter and low-noise amplifier.
- 5m long low loss and high efficiency/peak gain outdoor antenna cable (RG-174 for GNSS and TGC-200 for 5G/LTE and Wi-Fi) with SMA male connectors and Wi-Fi with male RP-SMA
- IP67 Rated Waterproof Enclosure
- RoHS and REACH Compliant



FANT-7IN1-TG-5M-FEV 5G/LTE Antenna Performance

5G/4G ANTENNA											
Frequency (MHz)		5G NR Band 71	LTE700	GSM 850/900	5G NR Band	DCS	PCS	UMTS1	LTE2600	5G NR Band 77, 78, 79	LTE5200 Wi-Fi 5800
		617 ~698	698 ~824	824 ~960	1427 ~1518	1710 ~1880	1850 ~1990	1920 ~2170	2300 ~2690	3300 ~3800	5150 ~5925
Efficiency (%)											
MIMO 1	5m	30.79	30.39	34.96	39.48	46.48	32.68	32.15	43.45	49.25	49.39
MIMO 2	5m	18.62	31.96	30.24	43.80	42.07	37.06	38.94	44.95	31.36	44.49
MIMO 3	5m	30.07	30.40	32.11	47.07	42.70	34.09	33.14	41.63	49.49	20.60
MIMO 4	5m	21.05	30.90	32.56	38.32	42.80	39.73	38.88	43.70	29.88	48.09
Average Gain (dB)											
MIMO 1	5m	-5.12	-5.17	-4.56	-4.04	-3.33	-4.86	-4.93	-3.62	-3.08	-3.06
MIMO 2	5m	-7.30	-4.95	-5.19	-3.59	-3.76	-4.31	-4.10	-3.47	-5.04	-3.52
MIMO 3	5m	-5.22	-5.17	-4.93	-3.27	-3.70	-4.67	-4.80	-3.81	-3.06	-6.86
MIMO 4	5m	-6.77	-5.10	-4.87	-4.17	-3.69	-4.01	-4.10	-3.59	-5.25	-3.18
Peak Gain (dBi)											
MIMO 1	5m	-0.08	1.04	2.03	2.94	4.55	2.93	3.20	4.96	5.82	5.90
MIMO 2	5m	-0.58	0.49	1.42	3.76	3.31	2.32	3.75	4.84	3.77	5.89
MIMO 3	5m	0.25	1.44	1.63	3.47	3.77	2.45	3.00	5.06	5.99	5.57
MIMO 4	5m	-0.20	1.13	2.93	2.52	3.61	2.79	3.97	4.76	2.91	6.28
Impedance		50 Ω									
Polarization		Linear									
Radiation Pattern		Omni									
Max. input power		2W									



Wi-Fi MIMO			
Frequency (MHz)		2400~2500	5150~5850
Efficiency (%)			
MIMO 1	5m	33.16	42.72
MIMO 2	5m	47.59	47.92
Average Gain (dB)			
MIMO 1	5m	-4.79	-3.69
MIMO 2	5m	-3.22	-3.19
Peak Gain (dBi)			
MIMO 1	5m	2.11	5.78
MIMO 2	5m	3.12	7.03
Impedance		50 Ω	
Polarization		Linear	
Radiation Pattern		Omni	
Max. input power		2W	

FANT-7IN1-TG-5M-FEV GNSS Antenna Performance

GNSS Name	GPS	GLONASS	BeiDou	Galileo	QZSS (Regional)	SBAS
COVERED BANDS	L1 (1575.42MHz)	G1 1602 MHz	B1C (1575.42 MHz) B1I (1561 MHz)	E1 (1575.42MHz)	L1 1575.42 MHz	L1/E1/B1 1575.42 MHz G1 1602 MHz

GNSS ELECTRICAL			
Frequency (MHz)	1561	1575.42	1602
VSWR (max.)	2.5	2.5	2.5
Passive Antenna Efficiency (%) (without cable loss)	40.02	48.39	44.29
Passive Antenna Gain at Zenith (dBic) (without cable loss)	3.75	4.44	4.54
Axial Ratio (dB)	20	11	15
Polarization		RHCP	
Impedance		50 Ω	



FANT-7IN1-TG-5M-FEV Active GNSS Antenna LNA and SAW Filter

LNA and Filter Electrical Properties			
Frequency (MHz)	1561	1575.42	1602
VSWR (max.)	2.0:1	2.0:1	2.0:1
Gain@1.8V (dBic)	28.8 dB	28.8 dB	28 dB
Gain@3.0V (dBic)	29 dB	29 dB	28.3 dB
Gain@5.5V (dBic)	29.6 dB	29.4 dB	28.7 dB
Noise@1.8V (dB)	2.8 dB	2.3 dB	2.8 dB
Noise@3.0V (dB)	2.8 dB	2.2 dB	2.8 dB
Noise@5.5V (dB)	2.9 dB	2.3 dB	2.8 dB
Power consumption@1.8V (mA)		8.7 mA	
Power consumption@3.0V (mA)		9.0 mA	
Power consumption@5.5V (mA)		11 mA	

FANT-7IN1-TG-5M-FEV Total Specification (Through Antenna, SAW Filter, and LNA)

Total Specification (Through Antenna, SAW Filter, and LNA)			
Frequency (MHz)	1561	1575.42	1602
Gain@3V (dBic)	31.7 ±3	32.4 ±3	32.4 ±3
Output Impedance		50 Ω	



FANT-7IN1-TG-5M-FEV Antenna 5G/4G Bands

5G/4G Bands			
5G NR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA			
Band Number	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓
8	UL: 880 to 915	DL: 925 to 960	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓
12	UL: 699 to 716	DL: 729 to 746	✓
13	UL: 777 to 787	DL: 746 to 756	✓
14	UL: 788 to 798	DL: 758 to 768	✓
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓
18	UL: 815 to 830	DL: 860 to 875 (LTE only)	✓
19	UL: 830 to 845	DL: 875 to 890	✓
20	UL: 832 to 862	DL: 791 to 821	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓
22	UL: 3410 to 3490	DL: 3510 to 3590	✓
23	UL: 2000 to 2020	DL: 2180 to 2200 (LTE only)	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✓
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓
29	UL: -	DL: 717 to 728 (LTE only)	✓
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	✗
32	UL: -	DL: 1452 - 1496	✓
35		1850 to 1910	✓
38		2570 to 2620	✓
39		1880 to 1920	✓
40		2300 to 2400	✓
41		2496 to 2690	✓
42		3400 to 3600	✓
43		3600 to 3800	✓
48		3550 to 3700	✓
66	UL: 1710 to 1780	DL: 2110 to 2200	✓
71		617 to 698	✓
74/75/76		1427 to 1518	✓
78		3300 to 3800	✓
79		4400 to 5000	✓

* Covered Bands represent greater than 20% efficiency.



Specifications

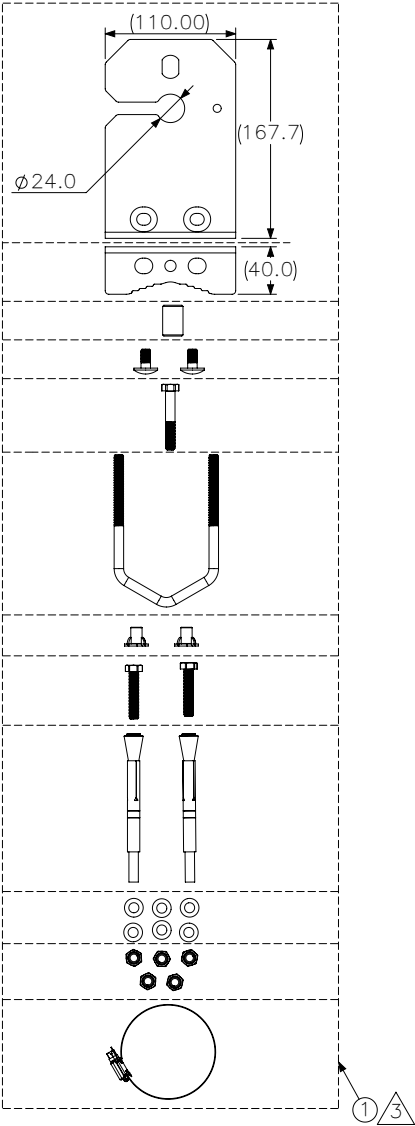
	FANT-3IN1-TG-5M-FEV	FANT-5IN1-TG-5M-FEV	FANT-7IN1-TG-5M-FEV
Mechanical			
Height	57.47 mm	57.47mm	57.47mm
Planner Dimension	Ø160 mm	Ø160mm	Ø160mm
Casing	PC	PC	PC
Cable	0.3 m RG-174LL with 4.7 m TGC-200 for 5G/4G - Fully Customizable 0.3 m RG-174LL with 4.7 m TGC-200 for GNSS - Fully Customizable	0.3m RG-174LL with 4.7m TGC-200 for 5G/4G – Fully Customizable 0.3m RG174LL with 4.7m TGC-200 for GNSS – Fully Customizable	5m TGC-200 for 5G/4G – Fully Customizable 5m TGC-200 for Wi-Fi – Fully Customizable 5m RG174 for GNSS – Fully Customizable
Connector	5G/4G SMA-Plug - Fully Customizable GNSS SMA-Plug - Fully Customizable	5G/4G_SMA-Plug – Fully Customizable GNSS_SMA-Plug – Fully Customizable	5G/4G SMA (M) Fully Customizable Wi-Fi: RP- RP-SMA(M) – Fully Customizable GNSS: SMA (M)– Fully Customizable
Thread	18.23 mm	18.23mm	18.23mm
Thread Diameter	M22	M22	M22
Waterproof	IP67	IP67	IP67
Sealant	Rubber Stopper and O-Ring	Rubber Stopper and O-Ring	Rubber Stopper and O-Ring
Weight	2.7 kg	2/7 Kg	2.5Kg
Environmental			
Ingress Protection	IP67	IP67	IP67
Temperature Range	-40°C to 85°C	-40°C to 85°C	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH	Non-condensing 65°C 95% RH	Non-condensing 65°C 95% RH
Cable Pull	RG-174 4 kg	RG-174 4 kg	RG-174 4 Kg
Mounting			
Vehicle	Roof mount	Roof mount	Roof mount
Outdoor	Wall/pole mount (mounting bracket is needed, purchasable accessory)	Wall/pole mount (mounting bracket is needed, purchasable accessory)	Wall/pole mount (mounting bracket is needed, purchasable accessory)








FANT-ANT-MNT-2BRKT

Mounting Bracket

Wall/pole mounting bracket kit used to mount Fortinet vehicle/outdoor antenna (such as FANT-3IN1-TG-5M-FEV, FANT-5IN1-TG-5M-FEV, and FANT-7IN1-TG-5M-FEV) for fixed outdoor application. Each package has two bracket sets inside (two sets per pack).



CONFIGURATIONS
 HOSE CLAMP POLE MOUNT Ø49mm (1.93") min., Ø79mm (3.11") max.
 V-BOLT POLE MOUNT Ø30mm (1.25") min., Ø70mm (2.75") max.
 T-NUT BEAM MOUNT t = 4mm (0.16") min., 24mm (0.94") max.
 ANCHOR BOLT WALL MOUNT Hole pattern; Ø9mm X 80.5mm center to center
 ANCHOR BOLT BASE MOUNT Hole pattern; Ø13mm X 47.0mm center to center



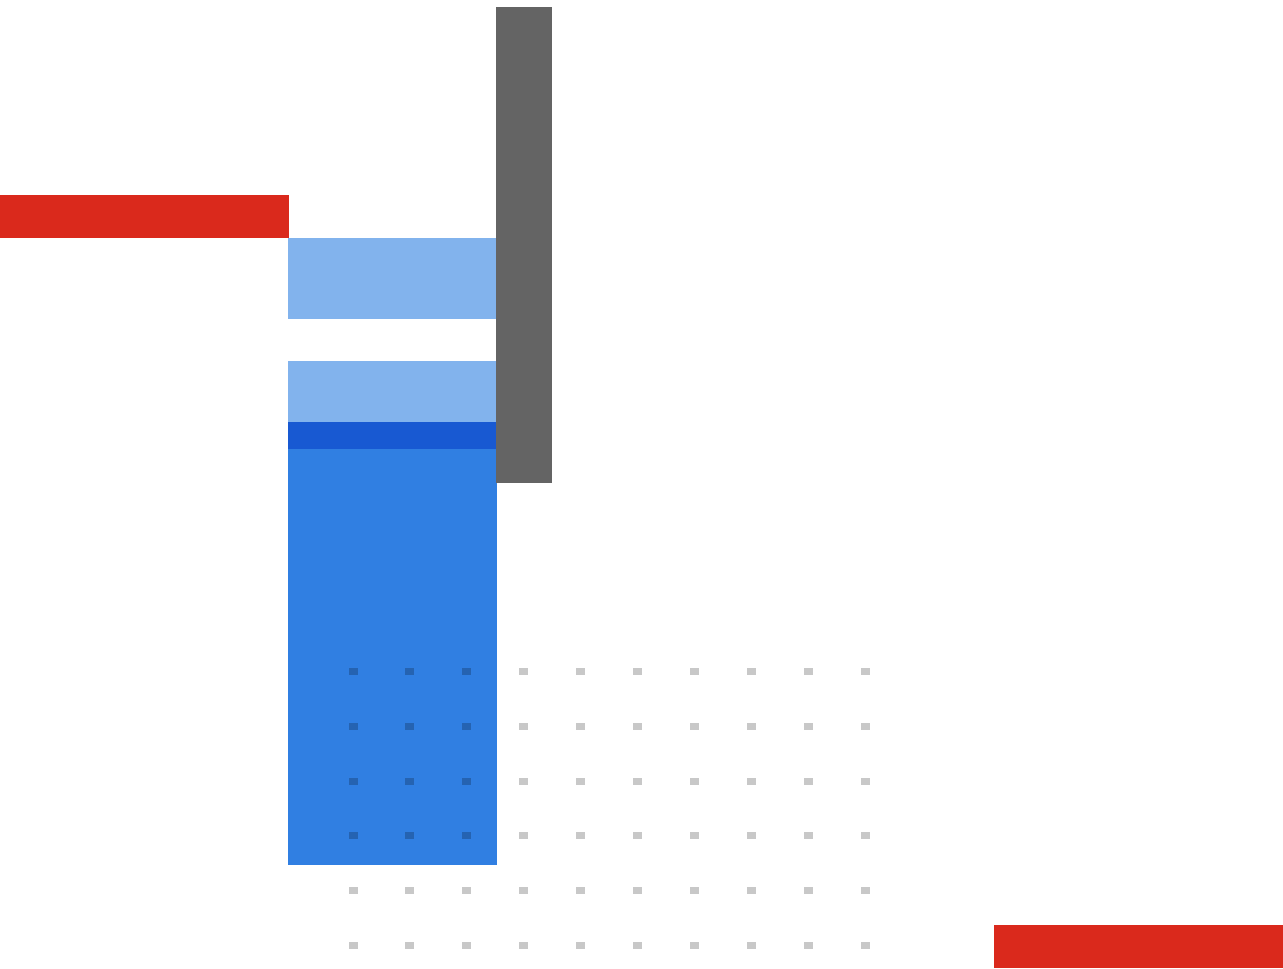
Ordering Information

Product	SKU	Description
FortiExtender Antenna	FANT-3IN1-TG-5M-FEV	3-in-1 permanent vehicle roof mount antenna for FEV-211F and FEV-211F-AM. Outdoor waterproof antenna with 2× 5G/LTE + 1x active GNSS and 5 meter antenna cable with SMA male connectors.
	FANT-5IN1-TG-5M-FEV	5-in-1 outdoor, waterproof, permanent vehicle roof mount antenna for FEV-212F/-AM and FEV-511G with 4× 5G/LTE + 1x Active GNSS and a 5-meter antenna cable with 5x SMA male connectors.
	FANT-7IN1-TG-5M-FEV	7-in-1 outdoor, waterproof, permanent vehicle roof mount antenna for FEV-212F/-AM and FEV-511G with 4× 5G/LTE, 2× 2.4G/5G Wi-Fi, 1x Active GNSS and a 5-meter antenna cable with 2x RP-SMA male connectors for Wi-Fi + 5x SMA male connectors for 5G/LTE and GNSS connectivity.
Mounting Kit	FEV-ANT-MNT-2BRKT	Wall/Pole mounting bracket kit for mounting the FortiExtender-Vehicle outdoor antenna for fixed outdoor application. Each package contains a set of two brackets inside (two sets per pack).



Fortinet Corporate Social Responsibility Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet’s products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the [Fortinet EULA](#) and report any suspected violations of the EULA via the procedures outlined in the [Fortinet Whistleblower Policy](#).



www.fortinet.com

Copyright © 2025 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's SVP Legal and above, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.