


FortiTester

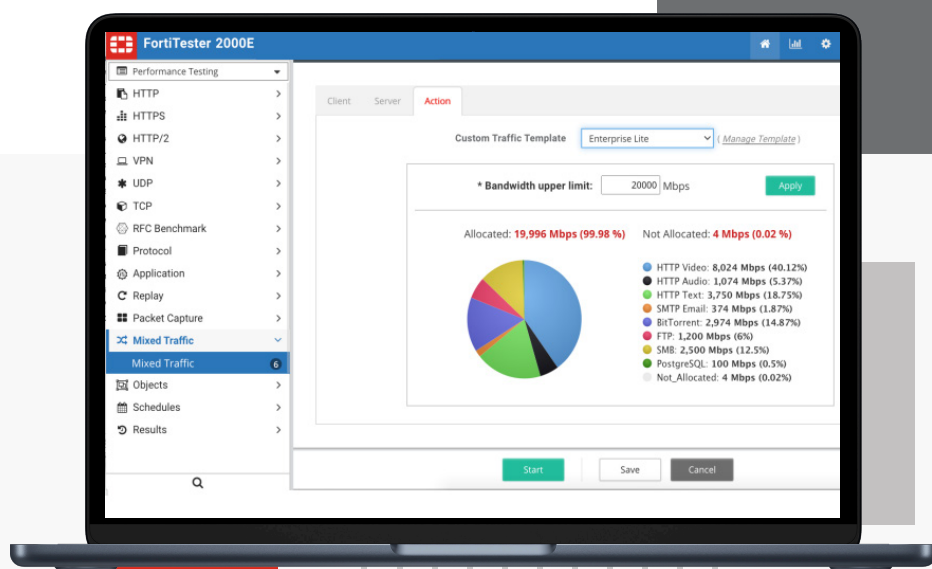

Highlights

- Up-to-date cyber threat simulation based on real world insight
- Best price and performance traffic generation and security testing system
- Flexible operation modes from one standalone device up to 8 devices combined
- Hardware, virtual appliances, and public cloud
- Server-Class hardware and packet-processing enhancements
- Throughput Testing up to 80 Gbps/ 800 Gbps Bi-directional Throughput
- Easy and Simple Web UI

Performance Testing and Breach Attack Simulation

FortiTester is a network security testing tool designed to identify and evaluate network security devices and applications. It can simulate network traffic, including malicious traffic, and test how security devices perform in detecting and mitigating threats. FortiTester supports a wide range of traffic types, including SSL, DDoS, and custom traffic.

It is an easy-to-use tool that allows security teams to assess the effectiveness of their network security solutions before deploying them in production environments. With FortiTester, organizations can ensure that their security infrastructure is capable of defending against advanced threats and is optimized for maximum performance.

Available in



Appliance

Features

Performance Testing and Traffic Generation

HTTP, HTTPS, HTTP/2, UDP Throughput, RFC2544, SSLVPN for FortiGates, and IPSEC testing, Traffic enterprise mix generation, and Q-in-Q traffic generation.

Breach Attack Simulation

MITRE ATT&CK simulation testing, CVE-based IPS testing, Fuzzing testing, Web/IOT attacks, FortiGuard Malware strike pack (with 20+ Ransomware), DDoS traffic generation, and PCAP replay.

Comprehensive API

Automate testing and simulation with full system, test simulation, and reporting API.



Highlights

Traffic Generation and Performance Testing

- HTTP, HTTPS, and HTTP/2
- UDP (PPS/Payload)
- TCP (Throughput, TurboTCP, CPS)
- RFC 2544 / RFC 3511
- SSLVPN and IPSEC testing (CPS/RPS/CC/Throughput)
- PCAP Replay, GTP Replay
- Q-in-Q Traffic Generation
- Scheduled Testing (hourly, daily, monthly)

Traffic Mix

- Enterprise Mix, IMix, Fortinet Enterprise, Enterprise Lite, Custom

Protocol Support

- TCP (CIFS, SMBv2, FIX, FTP, IMAP, LDAP, NFS, POP3, RDP, SMTP, SSH), UDP, DHCP, ICMP, RTSP/RTP, DNS (including DNS-AXFR)

Applications

- Amazon S3, AOL Chat, BitTorrent, DB2, Facebook, Gmail, GTalk, MSSQL, MySQL, NetFlix, Oracle TNS, PSQL, Twitter, WebEx, WhatsApp, Yahoo Mail, YouTube

Flexible Form Factor

- Powerful Appliances with 1G/10G/40G/100G Output
- Up to 80 Gbps (3000F) and 800 Gbps (4000F x8) Bi-Directional Traffic Simulation
- Test Centre Mode - up to eight devices in cluster (see model compatibility)

Breach Attack Simulation

- MITRE ATT&CK® Adversary Simulation
- Pre and Post Breach Simulation
- Comprehensive Reporting

Comprehensive Reporting

- PDF Exports
- API Retrieval of Cases Result and Reports

Security Testing

- DDoS testing (HTTP/UDP/TCP Session Flood)
- TCP / UDP / ICMP / IP Fuzzing Attack
- IPS Attacks (CVE-based and HTTP Evasion, SCADA/IOT attacks, Buffer Overflow, Code Injection, Path Traversal)
- Malware Strike Pack (Updated by FortiGuard daily with categories such as Ransomware and Trojan)
- Web Attacks (Cross Site scripting, SQL injection, Bad Robots, Privilege Escalation)
- Web Crawler (bulk URL replay)

Extensive API Support

- Case Management
- System Management
- Object Management
- User Management
- MITRE ATT&CK Management

Third Party Integration

- Administrator and RADIUS Support
- SYSLOG
- SNMP Traps and MIBs Support
- Certification Management
- FortiOS v7.0.1+ (Security Fabric Integration)
- FortiManager v6.4.6 and 7.0.1 (License activation and FortiGuard server updates)
- FortiSIEM v5.3.0 log integration


* BYOL support for public cloud, contact SE if images are not available on market place.



DEPLOYMENT


Standalone Mode

Test center works with the local traffic generator and receiver.

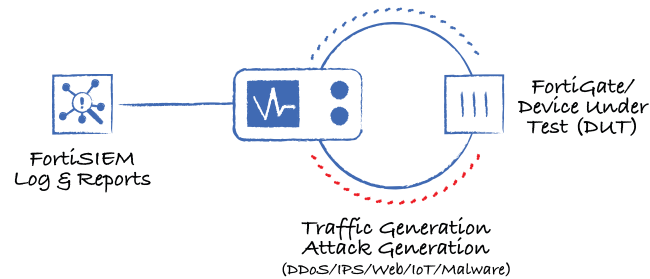

Test Centre Mode

Scale FortiTester performance by combining up to eight FortiTesters in a cluster.

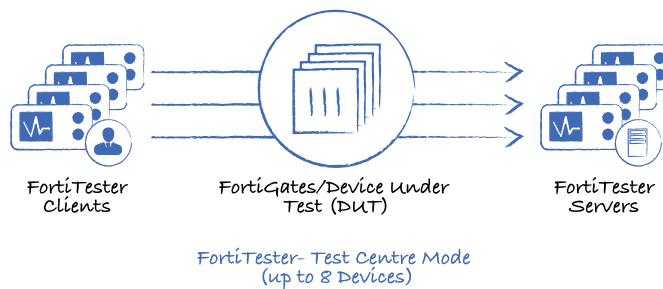

Use Cases

Secure Infrastructure Validation

- Evaluate Advanced Threat Protection (ATP) Technology
- Validate Technology, People, and Process

Breach Attack Simulation

- MITRE ATT&CK® Simulation
- Pre/Post Breach Simulation

Vendor Bake-Off

- Datasheet Performance Evaluation
- Future Proofing

SPECIFICATIONS

FORTITESTER 100F			FORTITESTER 2000F	
Hardware Specifications				
Total Interfaces		2× 10 GE SFP+, 2x GE SFP, 2x GE RJ45, 1x Console GE RJ45, 1x Management GE RJ45, 2x USB 3.0	4× 10 GE SFP+ slots, 1x Management GE RJ45 port	
Storage		1 TB HDD	1 TB HD	
Form Factor		1U	2U	
SSL Acceleration Card		No	No	
Performance Examples and Application Support				
	Standalone Mode	Test Center Mode with 8 Devices	Standalone Mode	Test Center Mode with 8 Devices
HTTP Throughput	10.0 Gbps	80.0 Gbps	20.0 Gbps	160.0 Gbps
HTTP Connections Per Second	700 000	5 600 000	961 000	7 200 000
HTTP Concurrent Connections	9 000 000	72 000 000	9 000 000	72 000 000
SSL Throughput	9.9 Gbps	79.6 Gbps	15 Gbps	118.4 Gbps
SSL Connections Per Second	2500	10 000	18 000	84 000
SSL Concurrent Connections	80 000	640 000	80 000	640 000
IPsec	Yes	Yes	Yes	Yes
SSL-VPN	Yes	Yes	Yes	Yes
Protocol TCP (CIFS, SMB, FIX, FTP, IMAP, LDAP, NFS, POP3, RDP, SMTP, SSH), UDP, DHCP, ICMP, RTSP/RTP	Yes	Yes	Yes	Yes
RFC2544 and 3511	Yes	Yes	Yes	Yes
IPS, Malware, MITRE ATT&CK, FUZZING, and DDOS	Yes	Yes	Yes	Yes
Replay — PCAP, Traffic, Attack, GTP	Yes	Yes	Yes	Yes
Traffic Mix (Enterprise / Lite / Fortinet Mix)	Yes	Yes	Yes	Yes
Dimensions and Power				
Height x Width x Length (inches)	1.73 × 17.32 × 19.69		1.73 × 17.24 × 22.83	
Height x Width x Length (mm)	44 × 440 × 500		44 × 438 × 580	
Weight	15.9 lbs (7.2 kg)		16.31 lbs (7.4 kg)	
Power Required	100–240V AC, 50-60 Hz, 6A-3A		100–240VAC, 63-47 Hz, Redundant	
Power Consumption (Average / Maximum)	90W / 120W		216 W / 240 W	
Maximum Current	120V/6A, 240V/3A		120V/5A, 240V/3A	
Heat Dissipation	477 BTU/h		819 BTU/h	
Redundant Power Supplies	No		Yes	
Environment				
Operating Temperature	32°F to 104°F (0°C to 40°C)		32°F to 104°F (0°C to 40°C)	
Storage Temperature	-4°F to 167°F (-20°C to 75°C)		-4°F to 158°F (-20°C to 70°C)	
Humidity	5% to 90% non-condensing		5% to 90% non-condensing	
Operating Altitude	Up to 7400 ft (2250 m)		<2000 m	
Compliance				
Regulatory Compliance	FCC, ICES, CE, RCM, VCCI, BSMI (Class A)		FCC Part 15 Class A, ICES, CE, RCM, VCCI	
Safety	UL/cUL, CB, BSMI		UL/cUL, CB , BSMI	

FortiTester 2000F/2500E – Based on SSL/TLS cipher suite: AES256-GCM-SHA384 with 2K key size.



SPECIFICATIONS

FORTITESTER 3000F			FORTITESTER 4000F	
Hardware Specifications				
Total Interfaces	2 × 40GE QSFP (breakout to 4 × 10GE SFP+ supported), 1 x GE RJ45(mgmt)		2× 100 GE QSFP28, 1x GE RJ45 (breakout cable not supported)	
Storage	2 TB		2 TB HDD	
Form Factor	1U		1U	
SSL Acceleration Card	Yes		Yes	
Performance and Application Support	Standalone Mode	Test Center Mode with 8 Devices	Standalone Mode	Test Center Mode with 8 Devices
HTTP Throughput	39.94 Gbps	316.00 Gbps	100 Gbps	800 Gbps
HTTP Connections Per Second	2 500 000	16 000 000	3 600 000	28 800 000
HTTP Concurrent Connections	36 000 000	308 000 000	76 000 000	608 000 000
SSL Throughput	39.93 Gbps	316.00 Gbps	99 Gbps	792 Gbps
SSL Connections Per Second	60 000	360 000	80 000	640 000
SSL Concurrent Connections	320 000	2 560 000	640 000	5 120 000
IPsec	Yes	Yes	Yes	Yes
SSL-VPN	Yes	Yes	Yes	Yes
Protocol TCP (CIFS, SMB, FIX, FTP, IMAP, LDAP, NFS, POP3, RDP, SMTP, SSH), UDP, DHCP, ICMP, RTSP/RTP	Yes	Yes	Yes	Yes
RFC2544 and 3511	Yes	Yes	Yes	Yes
IPS, Malware, MITRE ATT&CK, FUZZING, and DDOS	Yes	Yes	Yes	Yes
Replay — PCAP, Traffic, Attack, GTP	Yes	Yes	Yes	Yes
Traffic Mix Enterprise / Lite / Fortinet Mix	Yes	Yes	Yes	Yes
Dimensions and Power				
Height x Width x Length (inches)	1.73 × 17.20 × 24		1.73 × 17.24 × 22.83	
Height x Width x Length (mm)	44 × 437 × 610		44 × 438 × 580	
Weight	24.1 lbs (10.95 kg)		22.6 lbs (10.3 kg)	
Power Required	100–240V AC, 50–60 Hz, Redundant		100–240V AC, 63-47 Hz, Redundant	
Power Consumption (Average / Maximum)			300 W / 360 W	
Maximum Current	100V/2.3A, 240V/0.94A		120V/5A, 240V/3A	
Heat Dissipation	767 BTU/h		1160 BTU/h	
Redundant Power Supplies	Dual Power Supplies		Dual Power Supplies	
Environment				
Operating Temperature	32°F to 104°F (0°C to 40°C)			
Storage Temperature	-4°F to 158°F (-20°C to 70°C)			
Humidity	5% to 95% non-condensing			
Operating Altitude	Up to 7400 ft. (2250 m)			
Compliance				
Regulatory Compliance	FCC Part 15 Class A, RCM, VCCI, CE, UL/c			
Safety	CSA, C/US, CE, UL			

FortiTester 4000F – Based on SSL/TLS cipher suite: AES256-GCM-SHA384 with 2K key size. * FortiTester 4000F SSL performance uses 6 cores, 2 cores are used for system/management.



FortiTester Test Center Mode Support

In order to run Test Center mode, FortiTester supports grouping similar members above in the same Test Center group.

TEST CENTER GROUP	MEMBERS
100	FTS-100F
2K	FTS-2000F
3K	FTS-3000F
4K	FTS-4000F

Ordering Information

SERVICES SKU / UPDATES ENTITLEMENT	ENTERPRISE BUNDLE	PREMIUM ATTACK SIGNATURES	MALWARE STRIKE PACK	MITRE ATT&CK
IPS	✓	✓		
Web Attacks	✓	✓		
IOT / SCADA Attacks	✓	✓		
Malware Strike Pack	✓		✓	
MITRE ATT&CK	✓			✓



Ordering Information


PRODUCT	SKU	DESCRIPTION
HARDWARE		
FortiTester 100F	FTS-100F	Network Performance and Security Testing System for Enterprises and Service Providers — 1x GE MGMT port, 2x GE RJ45 ports, 2x GE SFP ports, 2x 10GE SFP+ ports. 1TB HDD Storage.
	FTS-100F-BDL-293-DD	Hardware plus Enterprise bundle (IPS attack PCAPs update, malware strike pack, web protection and MITRE ATT&CK signature updates), with 24x7 FortiCare support.
FortiTester 2000F	FTS-2000F	Network performance and security testing system for enterprises and service providers — 1x GE RJ45 (mgmt), 4x 10GE SFP+, 2 TB HDD Storage, SSL card for acceleration.
	FTS-2000F-BDL-293-DD	Hardware plus Enterprise bundle (IPS attack PCAPs update, malware strike pack, web protection and MITRE ATT&CK signature updates), with FortiCare Premium support.
FortiTester 3000F	FTS-3000F	Network performance and security testing system for enterprises and service providers — 1x GE RJ45 (mgmt), 2x 40GE QSFP (can split to 2x 10GE SFP+), 2 TB HDD Storage, equipped with SSL acceleration card.
	FTS-3000F-BDL-293-DD	Hardware plus Enterprise bundle (IPS attack PCAPs update, malware strike pack, web protection and MITRE ATT&CK signature updates), with FortiCare Premium support.
FortiTester 4000F	FTS-4000F	Network Performance and Security Testing System for Enterprises and Service Providers — 1x GE RJ45, 2x 100 GE QSFP28, 2 TB HDD storage.
	FTS-4000F-BDL-293-DD	Hardware plus Enterprise bundle (IPS attack PCAPs update, malware strike pack, web protection and MITRE ATT&CK signature updates), with 24x7 FortiCare support.
ACCESSORIES SUPPORT 100F/2000D/2000E		
1GE SFP RJ45 Transceiver Module (except FTS-100F)	FN-TRAN-GC	1GE SFP RJ45 transceiver module for all systems with SFP and SFP/SFP+ slots.
1GE SFP LX Transceiver Module	FN-TRAN-LX	1GE SFP LX transceiver module for all systems with SFP and SFP/SFP+ slots.
1GE SFP SX Transceiver Module	FN-TRAN-SX	1GE SFP SX transceiver module for all systems with SFP and SFP/SFP+ slots.
10GE SFP+ Transceiver Module, Long Range	FN-TRAN-SFP+LR	10GE SFP+ transceiver module, long range for all systems with SFP+ and SFP/SFP+ slots.
10GE SFP+ Transceiver Module, Short Range	FN-TRAN-SFP+SR	10GE SFP+ transceiver module, short range for all systems with SFP+ and SFP/SFP+ slots.
10GE SFP+ Passive Direct Attach Cable	SP-CABLE-FS-SFP+1	10GE SFP+ Passive Direct Attach Cable, 1 m for Systems with SFP+ and SFP/SFP+ slots.
10GE SFP+ Passive Direct Attach Cable	SP-CABLE-FS-SFP+3	10GE SFP+ Passive Direct Attach Cable, 3 m for Systems with SFP+ and SFP/SFP+ slots.
10GE SFP+ Passive Direct Attach Cable	SP-CABLE-FS-SFP+5	10GE SFP+ Passive Direct Attach Cable, 5 m for Systems with SFP+ and SFP/SFP+ slots.
10GE SFP+ Passive Direct Attach Cable	SP-CABLE-FS-SFP+7	10GE SFP+ Passive Direct Attach Cable, 7 m for Systems with SFP+ and SFP/SFP+ slots.
10GE SFP+ Active Direct Attach Cable, 10m / 32.8 ft	SP-CABLE-ADASFP+	10GE SFP+ active direct attach cable, 10m / 32.8 ft for all systems with SFP+ and SFP/SFP+ slots.
ACCESSORIES SUPPORT 3000F		
40GE QSFP+ Transceiver Module, Short Range	FN-TRAN-QSFP+SR	40GE QSFP+ transceivers, short range for all systems with QSFP+ Slots.
40GE QSFP+ Passive Direct Attach Cable	SP-CABLE-FS-QSFP+1	40GE QSFP+ Passive Direct Attach Cable, 1 m for Systems with QSFP+ slots.
40GE QSFP+ Passive Direct Attach Cable	SP-CABLE-FS-QSFP+3	40GE QSFP+ Passive Direct Attach Cable, 3 m for Systems with QSFP+ slots.
40GE QSFP+ Passive Direct Attach Cable	SP-CABLE-FS-QSFP+5	40GE QSFP+ Passive Direct Attach Cable, 5 m for Systems with QSFP+ slots.
ACCESSORIES SUPPORT 4000F		
100 GE QSFP28 Transceiver Module, Extended Long Range	FN-TRAN-QSFP28-ER	100 GE QSFP28 transceivers, extended long range 20KM for all systems with QSFP28 Slots.
100 GE QSFP28 Transceiver Module, Long Range	FN-TRAN-QSFP28-LR	100 GE QSFP28 transceivers, 4 channel parallel fiber, long range for all systems with QSFP28 Slots.
SECURITY SERVICES		
FortiTester XXXX	FC-10-XXXX-293-02-DD	Enterprise bundle (IPS attack PCAPs update, malware strike pack, web protection, and MITRE ATT&CK signature updates), with 24x7 FortiCare support.
	FC-10-XXXX-187-02-DD	FortiTester Premium Attack Signatures (FDS update of IPS attack PCAPs update, plus web protection signatures updates).
	FC-10-XXXX-318-02-DD	FortiTester ATT&CK MITRE Attack Package (Windows/ Linux/ Mac attacks based on MITRE techniques).
	FC-10-XXXX-261-02-DD	FortiTester Malware Strike Pack (FortiGuard auto update).
	FC-10-XXXX-1130-02-DD	FortiTester Public IP traffic test package to allow traffic testing to non-private IP address range. Note: Require a FNDN membership to avail this Feature.
	FC-10-XXXX-247-02-DD	FortiCare Premium Support.

XXXX = hardware model such as FT01H, FTE2K, FT2KE, FTK3K, FTK4K



Fortinet Corporate Social Responsibility Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the [Fortinet EULA](#) and report any suspected violations of the EULA via the procedures outlined in the [Fortinet Whistleblower Policy](#).

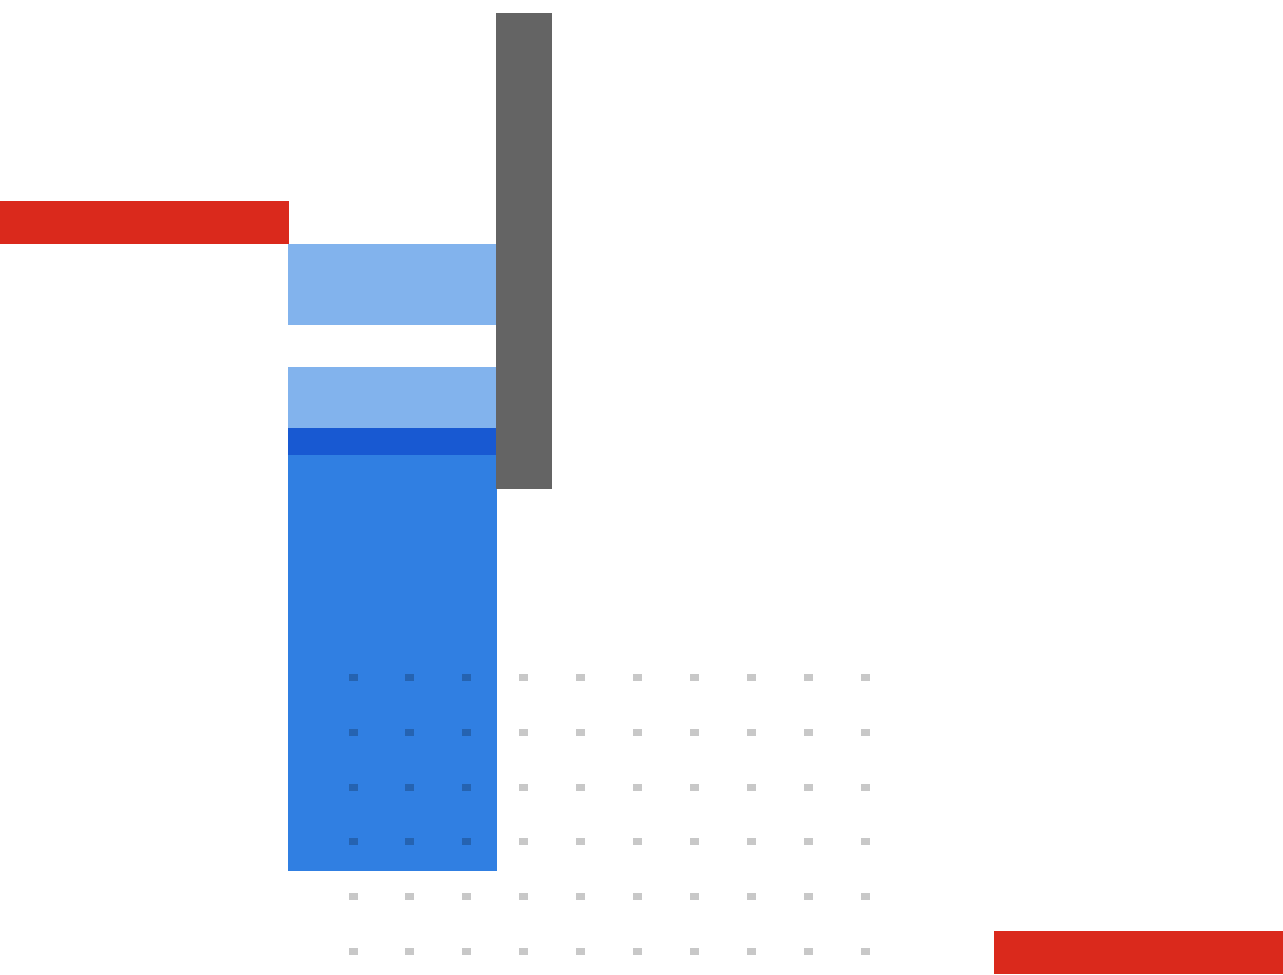

www.fortinet.com

Copyright © 2025 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's SVP Legal and above, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.